



BGP Scaling Techniques

ISP/IXP Workshops

Cisco/ISPWorkshops © 2013 Cisco Systems, Inc. All rights reserved. 1

BGP Scaling Techniques


- How to scale iBGP mesh beyond a few peers?
- How to implement new policy without causing flaps and route churning?
- How to reduce the overhead on the routers?

Cisco/ISPWorkshops © 2013 Cisco Systems, Inc. All rights reserved. 2

BGP Scaling Techniques

- Dynamic reconfiguration
- Peer groups
- Route flap damping
- Route reflectors
- (Confederations)

Cisco/ISPWorkshops © 2013 Cisco Systems, Inc. All rights reserved. 3

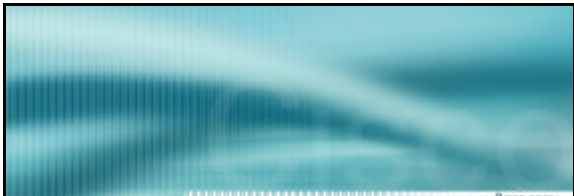

Dynamic Reconfiguration

Route Refresh and Soft Reconfiguration

Cisco/ISPWorkshops © 2013 Cisco Systems, Inc. All rights reserved. 4

Route Refresh

Problem:

- Hard BGP peer reset required after every policy change because the router does not store prefixes that are rejected by policy
- Hard BGP peer reset:
 - Consumes CPU
 - Severely disrupts connectivity for all networks

Solution:

- **Route Refresh**

Cisco/ISPWorkshops © 2013 Cisco Systems, Inc. All rights reserved. 5

Route Refresh Capability

- Facilitates non-disruptive policy changes
- No configuration is needed
- No additional memory is used
- Requires peering routers to support "route refresh capability" – RFC2918
- **clear ip bgp x.x.x.x in** tells peer to resend full BGP announcement
- **clear ip bgp x.x.x.x out** resends full BGP announcement to peer

Cisco/ISPWorkshops © 2013 Cisco Systems, Inc. All rights reserved. 6

Dynamic Reconfiguration


- Use Route Refresh capability if supported
find out from "show ip bgp neighbor"
Non-disruptive, "Good For the Internet"
- Otherwise use Soft Reconfiguration IOS feature
- Only hard-reset a BGP peering resort

Consider the impact to be equivalent to a router reboot

Soft Reconfiguration

- Router normally stores prefixes which have been received from peer after policy application
Enabling soft-reconfiguration means router also stores prefixes/attributes received prior to any policy application
- New policies can be activated without tearing down and restarting the peering session
- Configured on a per-neighbour basis
- Uses more memory to keep prefixes whose attributes have been changed or have not been accepted
- Also **advantageous** when operator requires to know which prefixes have been sent to a router prior to the application of any inbound policy

Soft Reconfiguration

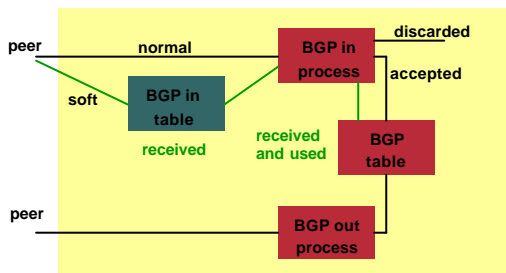

Configuring Soft Reconfiguration

```
router bgp 100
neighbor 1.1.1.1 remote-as 101
neighbor 1.1.1.1 route-map infiltrer in
neighbor 1.1.1.1 soft-reconfiguration inbound
! Outbound does not need to be configured !
Then when we change the policy, we issue an exec command
clear ip bgp 1.1.1.1 soft [in | out]
```

Managing Policy Changes

- Ability to clear the BGP sessions of groups of neighbours configured according to several criteria
- `clear ip bgp <addr> [soft] [in|out]`
<addr> may be any of the following

x.x.x.x	IP address of a peer
*	all peers
ASN	all peers in an AS
external	all external peers
peer-group <name>	all peers in a peer-group

Peer Groups

Peer Groups

- **Problem – how to scale iBGP**
 - Large iBGP mesh slow to build
 - iBGP neighbours receive the same update
 - Router CPU wasted on repeat calculations
- **Solution – peer-groups**
 - Group peers with the same outbound policy
 - Updates are generated once per group

Peer Groups – Advantages

- Makes configuration easier
- Makes configuration less prone to error
- Makes configuration more readable
- Lower router CPU load
- iBGP mesh builds more quickly
- Members can have different inbound policy
- Can be used for eBGP neighbours too!

Configuring a Peer Group

```
router bgp 100
  neighbor ibgp-peer peer-group
  neighbor ibgp-peer remote-as 100
  neighbor ibgp-peer update-source loopback 0
  neighbor ibgp-peer send-community
  neighbor ibgp-peer route-map outfilter out
  neighbor 1.1.1.1 peer-group ibgp-peer
  neighbor 2.2.2.2 peer-group ibgp-peer
  neighbor 2.2.2.2 route-map infilter in
  neighbor 3.3.3.3 peer-group ibgp-peer
```

! note how 2.2.2.2 has different inbound filter from peer-group !

Configuring a Peer Group

```
router bgp 100
  neighbor external-peer peer-group
  neighbor external-peer send-community
  neighbor external-peer route-map set-metric out
  neighbor 160.89.1.2 remote-as 200
  neighbor 160.89.1.2 peer-group external-peer
  neighbor 160.89.1.4 remote-as 300
  neighbor 160.89.1.4 peer-group external-peer
  neighbor 160.89.1.6 remote-as 400
  neighbor 160.89.1.6 peer-group external-peer
  neighbor 160.89.1.6 filter-list infilter in
```

Peer Groups

- **Always configure peer-groups for iBGP**
 - Even if there are only a few iBGP peers
 - Easier to scale network in the future
- **Consider using peer-groups for eBGP**
 - Especially useful for multiple BGP customers using same AS (RFC2270)
 - Also useful at Exchange Points where ISP policy is generally the same to each peer

Route Flap Damping

Stabilising the Network

Route Flap Damping

- **Route flap**
 - Going up and down of path or change in attribute
 - BGP WITHDRAW followed by UPDATE = 1 flap
 - eBGP neighbour going down/up is NOT a flap
 - Ripples through the entire Internet
 - Wastes CPU
- **Damping aims to reduce scope of route flap propagation**


Route Flap Damping (continued)

- **Requirements**
 - Fast convergence for normal route changes
 - History predicts future behaviour
 - Suppress oscillating routes
 - Advertise stable routes
- **Implementation described in RFC 2439**

Operation

- **Add penalty (1000) for each flap**
 - Change in attribute gets penalty of 500
- **Exponentially decay penalty**
 - half life determines decay rate
- **Penalty above suppress-limit**
 - do not advertise route to BGP peers
- **Penalty decayed below reuse-limit**
 - re-advertise route to BGP peers
 - penalty reset to zero when it is half of reuse-limit

Operation

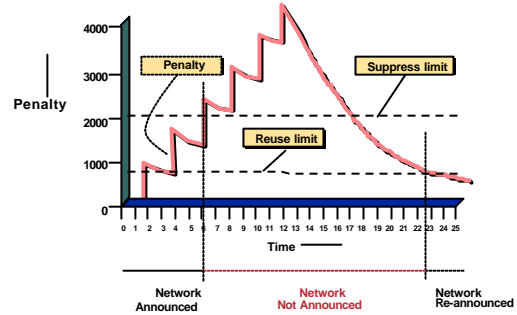

Operation

- **Only applied to inbound announcements from eBGP peers**
- **Alternate paths still usable**
- **Controlled by:**
 - Half-life (default 15 minutes)
 - reuse-limit (default 750)
 - suppress-limit (default 2000)
 - maximum suppress time (default 60 minutes)

Configuration

Fixed damping

```
router bgp 100
  bgp damping [<half-life> <reuse-value> <suppress-
  penalty> <maximum suppress time>]
```

Selective and variable damping

```
bgp dampinging [route-map <name>]
route-map <name> permit 10
  match ip address prefix-list FLAP-LIST
  set dampinging [<half-life> <reuse-value> <suppress-
  penalty> <maximum suppress time>]
ip prefix-list FLAP-LIST permit 192.0.2.0/24 le 32
```

Operation

- Care required when setting parameters
- Penalty must be less than reuse-limit at the maximum suppress time
- Maximum suppress time and half life must allow penalty to be larger than suppress limit

Configuration

- Examples – ✗
bgp dampening 30 750 3000 60
reuse-limit of 750 means maximum possible penalty is 3000 – no prefixes suppressed as penalty cannot exceed suppress-limit
- Examples – ✓
bgp dampening 30 2000 3000 60
reuse-limit of 2000 means maximum possible penalty is 8000 – suppress limit is easily reached

Configuration

- Examples – ✗
bgp dampening 15 500 2500 30
reuse-limit of 500 means maximum possible penalty is 2000 – no prefixes suppressed as penalty cannot exceed suppress-limit
- Examples – ✓
bgp dampening 15 750 3000 45
reuse-limit of 750 means maximum possible penalty is 6000 – suppress limit is easily reached

Maths!

- Maximum value of penalty is
$$\text{max-penalty} = \text{reuse-limit} \times 2^{\left(\frac{\text{max-suppress-time}}{\text{half-life}}\right)}$$
- Always make sure that suppress-limit is **LESS** than max-penalty otherwise there will be no route damping

Enhancements

- Selective damping based on AS-path, Community, Prefix
- Variable damping
recommendations for ISPs
<http://www.ripe.net/docs/ripe-229.html>
- Flap statistics

```
show ip bgp neighbor <x.x.x.x> [dampened-routes | flap-statistics]
```


Route Reflectors

Scaling the iBGP mesh

Scaling iBGP mesh

Avoid $\frac{1}{2}n(n-1)$ iBGP mesh

$n=1000 \Rightarrow$ nearly half a million iBGP sessions!



Two solutions


Route reflector – simpler to deploy and run

Confederation – more complex, has corner case advantages

© 2003 Cisco Systems, Inc. All rights reserved.

31

Route Reflector: Principle

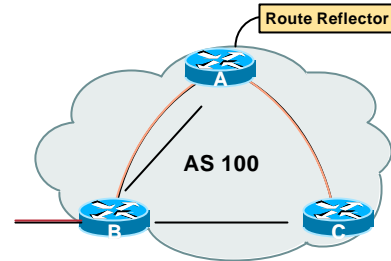


© 2003 Cisco Systems, Inc. All rights reserved.

32

Route Reflector

- Reflector receives path from clients and non-clients
- Selects best path
- If best path is from client, reflect to other clients and non-clients
- If best path is from non-client, reflect to clients only
- Non-meshed clients
- Described in RFC2796



© 2003 Cisco Systems, Inc. All rights reserved.

33

Route Reflector Topology

- Divide the backbone into multiple clusters
- At least one route reflector and few clients per cluster
- Route reflectors are fully meshed
- Clients in a cluster could be fully meshed
- Single IGP to carry next hop and local routes

© 2003 Cisco Systems, Inc. All rights reserved.

34

Route Reflectors: Loop Avoidance

- Originator_ID attribute
Carries the RID of the originator of the route in the local AS (created by the RR)
- Cluster_list attribute
The local cluster-id is added when the update is sent by the RR
Cluster-id is router-id (address of loopback)
Do NOT use bgp cluster-id x.x.x.x

© 2003 Cisco Systems, Inc. All rights reserved.

35


Route Reflectors: Redundancy

- Multiple RRs can be configured in the same cluster – not advised!
All RRs in the cluster **must** have the same cluster-id (otherwise it is a different cluster)
- A router may be a client of RRs in different clusters
Common today in ISP networks to overlay two clusters – redundancy achieved that way
® Each client has two RRs = redundancy

© 2003 Cisco Systems, Inc. All rights reserved.

36

Route Reflectors: Redundancy

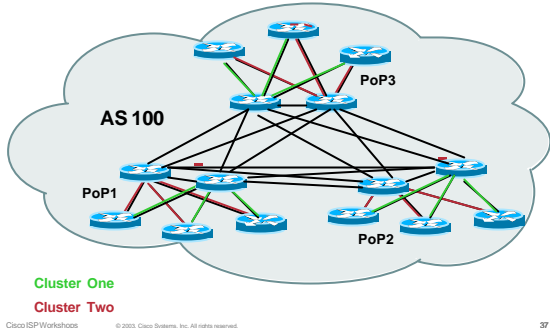

Cluster One
Cluster Two

© 2003 Cisco Systems, Inc. All rights reserved.

37

Route Reflector: Benefits

- Solves iBGP mesh problem
- Packet forwarding is not affected
- Normal BGP speakers co-exist
- Multiple reflectors for redundancy
- Easy migration
- Multiple levels of route reflectors

© 2003 Cisco Systems, Inc. All rights reserved.

38


Route Reflectors: Migration

- Where to place the route reflectors?
Follow the physical topology!
This will guarantee that the packet forwarding won't be affected
- Configure one RR at a time
Eliminate redundant iBGP sessions
Place one RR per cluster

© 2003 Cisco Systems, Inc. All rights reserved.

39

Route Reflector: Migration

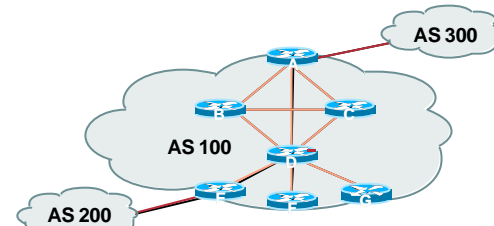

- Migrate small parts of the network, one part at a time.

© 2003 Cisco Systems, Inc. All rights reserved.

40

Configuring a Route Reflector

```
router bgp 100
neighbor 1.1.1.1 remote-as 100
neighbor 1.1.1.1 route-reflector-client
neighbor 2.2.2.2 remote-as 100
neighbor 2.2.2.2 route-reflector-client
neighbor 3.3.3.3 remote-as 100
neighbor 3.3.3.3 route-reflector-client
```

© 2003 Cisco Systems, Inc. All rights reserved.

41

BGP Scaling Techniques

- These 4 techniques should be core requirements on all ISP networks
 - Route Refresh (or Soft Reconfiguration)
 - Peer groups
 - Route Flap Damping
 - Route Reflectors

© 2003 Cisco Systems, Inc. All rights reserved.


42

BGP Confederations

- ## Confederations
- Divide the AS into sub-AS
 - eBGP between sub-AS, but some iBGP information is kept
 - Preserve NEXT_HOP across the sub-AS (IGP carries this information)
 - Preserve LOCAL_PREF and MED
 - Usually a single IGP
 - Described in RFC3065


- ## Confederations
- Visible to outside world as single AS – “Confederation Identifier”
 - Each sub-AS uses a number from the private space (64512-65534)
 - iBGP speakers in sub-AS are fully meshed
 - The total number of neighbors is reduced by limiting the full mesh requirement to only the peers in the sub-AS

Confederations



- Configuration (rtr B):


```
router bgp 65532
  bgp confederation identifier 200
  bgp confederation peers 65530 65531
  neighbor 141.153.12.1 remote-as 65530
  neighbor 141.153.17.2 remote-as 65531
```

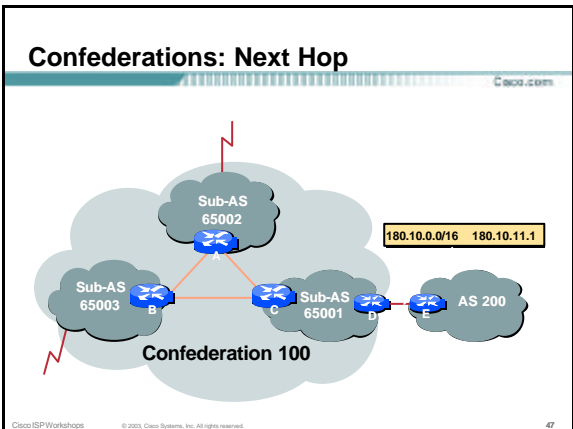


- ## Confederation: Principle
- Local preference and MED influence path selection
 - Preserve local preference and MED across sub-AS boundary
 - Sub-AS eBGP path administrative distance

Confederations: Loop Avoidance

- Sub-AS traversed are carried as part of AS-path
- AS-sequence and AS path length
- Confederation boundary
- AS-sequence should be skipped during MED comparison

Confederations: AS-Sequence

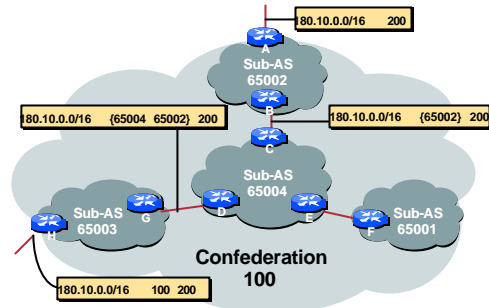

Route Propagation Decisions

- Same as with “normal” BGP:
 - From peer in same sub-AS → only to external peers
 - From external peers → to all neighbors
- “External peers” refers to
 - Peers outside the confederation
 - Peers in a different sub-AS
 - Preserve LOCAL_PREF, MED and NEXT_HOP

Confederations (cont.)

Example (cont.):

```

BGP table version is 78, local router ID is 141.153.17.1
Status codes: s suppressed, d damped, h history, * valid, >
best, i - internal
Origin codes: i - IGP, e - EGP, ? - incomplete
Network      Next Hop    Metric  LocPrf  Weight  Path
*> 10.0.0.0   141.153.14.3  0      100     0      (65531) 1 i
*> 141.153.0.0 141.153.30.2  0      100     0      (65530) i
*> 144.10.0.0  141.153.12.1  0      100     0      (65530) i
*> 199.10.10.0 141.153.29.2  0      100     0      (65530) 1 i
    
```

More points about confederations

- Can ease “absorbing” other ISPs into you ISP – e.g., if one ISP buys another (can use local-as feature to do a similar thing)
- You can use route-reflectors with confederation sub-AS to reduce the sub-AS iBGP mesh

Confederations: Benefits

- Solves iBGP mesh problem
- Packet forwarding not affected
- Can be used with route reflectors
- Policies could be applied to route traffic between sub-AS's

Confederations: Caveats

cisco.com

- Minimal number of sub-AS
- Sub-AS hierarchy
- Minimal inter-connectivity between sub-AS's
- Path diversity
- Difficult migration
 - BGP reconfigured into sub-AS must be applied across the network

Cisco/ISPWorkshops

© 2003 Cisco Systems, Inc. All rights reserved.

55

RRs or Confederations

	Internet Connectivity	Multi-Level Hierarchy	Policy Control	Scalability	Migration Complexity
Confederations	Anywhere in the Network	Yes	Yes	Medium	Medium to High
Route Reflectors	Anywhere in the Network	Yes	Yes	Very High	Very Low

Most new service provider networks now deploy Route Reflectors from Day One

Cisco/ISPWorkshops

© 2003 Cisco Systems, Inc. All rights reserved.

56

BGP Scaling Techniques

ISP/IXP Workshops

Cisco/ISPWorkshops

© 2003 Cisco Systems, Inc. All rights reserved.

57