

Routing Basics

ISP/IXP Workshops

Cisco ISP Workshops © 2005, Cisco Systems, Inc. All rights reserved. 1

Routing Concepts

- IPv4
- Routing
- Forwarding
- Some definitions
- Policy options
- Routing Protocols

Cisco ISP Workshops © 2005, Cisco Systems, Inc. All rights reserved. 2

IPv4

- Internet uses IPv4
 - addresses are 32 bits long
 - range from 1.0.0.0 to 223.255.255.255
 - 0.0.0.0 to 0.255.255.255 and 224.0.0.0 to 255.255.255.255 have "special" uses
- IPv4 address has a network portion and a host portion


Cisco ISP Workshops © 2005, Cisco Systems, Inc. All rights reserved. 3

IPv4 address format

- Address and subnet mask
 - written as
 - 12.34.56.78 255.255.255.0 *or*
 - 12.34.56.78/24
 - mask represents the number of network bits in the 32 bit address
 - the remaining bits are the host bits

Cisco ISP Workshops © 2005, Cisco Systems, Inc. All rights reserved. 4


What does a router do?



Cisco ISP Workshops © 2005, Cisco Systems, Inc. All rights reserved. 5

A day in a life of a router

- find path
- forward packet, forward packet, forward packet, forward packet...
- find alternate path
- forward packet, forward packet, forward packet, forward packet...
- repeat until powered off



Cisco ISP Workshops © 2005, Cisco Systems, Inc. All rights reserved. 6

Routing versus Forwarding

- Routing = building maps and giving directions
- Forwarding = moving packets between interfaces according to the “directions”



Cisco ISP
Workshops

© 2005, Cisco Systems, Inc. All rights reserved.

7

IP Routing – finding the path

- Path derived from information received from a routing protocol
- Several alternative paths may exist
best next hop stored in **forwarding table**
- Decisions are updated periodically or as topology changes (event driven)
- Decisions are based on:
topology, policies and metrics (hop count, filtering, delay, bandwidth, etc.)

Cisco ISP
Workshops

© 2005, Cisco Systems, Inc. All rights reserved.

8

IP route lookup

- Based on destination IP packet
- “longest match” routing
more specific prefix preferred over less specific prefix
example: packet with destination of 10.1.1.1/32 is sent to the router announcing 10.1/16 rather than the router announcing 10/8.


Cisco ISP
Workshops

© 2005, Cisco Systems, Inc. All rights reserved.

9

IP route lookup

- Based on destination IP packet

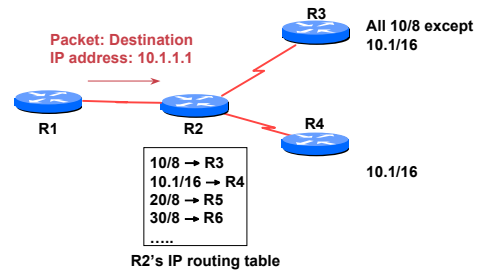


Cisco ISP
Workshops

© 2005, Cisco Systems, Inc. All rights reserved.

10

IP route lookup: Longest match routing

- Based on destination IP packet

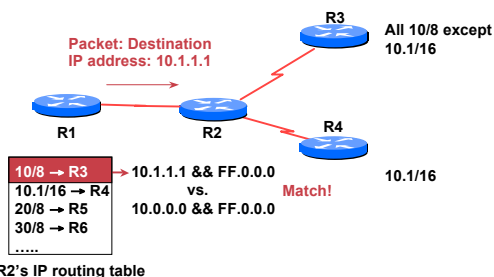


Cisco ISP
Workshops

© 2005, Cisco Systems, Inc. All rights reserved.

11

IP route lookup: Longest match routing

- Based on destination IP packet

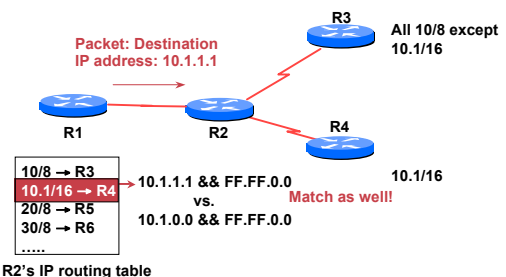

Cisco ISP
Workshops

© 2005, Cisco Systems, Inc. All rights reserved.

12

IP route lookup: Longest match routing

- Based on destination IP packet

Packet: Destination IP address: 10.1.1.1

| |
|------------------|
| 10/8 → R3 |
| 10.1/16 → R4 |
| 20/8 → R5 |
| 30/8 → R6 |
| |

10.1.1.1 && FF.0.0.0 vs. 20.0.0.0 && FF.0.0.0 **Does not match!**

R2's IP routing table

Cisco ISP Workshops © 2005, Cisco Systems, Inc. All rights reserved. 13

IP route lookup: Longest match routing

- Based on destination IP packet

Packet: Destination IP address: 10.1.1.1

| |
|------------------|
| 10/8 → R3 |
| 10.1/16 → R4 |
| 20/8 → R5 |
| 30/8 → R6 |
| |

10.1.1.1 && FF.0.0.0 vs. 30.0.0.0 && FF.0.0.0 **Does not match!**

R2's IP routing table

Cisco ISP Workshops © 2005, Cisco Systems, Inc. All rights reserved. 14

IP route lookup: Longest match routing

- Based on destination IP packet

Packet: Destination IP address: 10.1.1.1

| |
|---------------------|
| 10/8 → R3 |
| 10.1/16 → R4 |
| 20/8 → R5 |
| 30/8 → R6 |
| |

Longest match, 16 bit netmask

R2's IP routing table

Cisco ISP Workshops © 2005, Cisco Systems, Inc. All rights reserved. 15

IP Forwarding

- Router makes decision on which interface a packet is sent to
- Forwarding table populated by routing process
- Forwarding decisions:
 - destination address
 - class of service (fair queuing, precedence, others)
 - local requirements (packet filtering)
- Can be aided by special hardware

Cisco ISP Workshops © 2005, Cisco Systems, Inc. All rights reserved. 16

Routing Tables Feed the Forwarding Table

Forward Table (FIB)

Routing Information Base (RIB)

- BGP 4 Routing Table
- OSPF - Link State Database
- Static Routes

Cisco ISP Workshops © 2005, Cisco Systems, Inc. All rights reserved. 17

RIBs and FIBs

- FIB is the Forwarding Table**
 - It contains destinations and the interfaces to get to those destinations
 - Used by the router to figure out where to send the packet
 - Careful! Some people call this a route!
- RIB is the Routing Table**
 - It contains a list of all the destinations and the various next hops used to get to those destinations - and lots of other information too!
 - One destination can have lots of possible next-hops - only the best next-hop goes into the FIB

Cisco ISP Workshops © 2005, Cisco Systems, Inc. All rights reserved. 18

Explicit versus Default Routing

- **Default:**
 - simple, cheap (cycles, memory, bandwidth)
 - low granularity (metric games)
- **Explicit (default free zone)**
 - high overhead, complex, high cost, high granularity
- **Hybrid**
 - minimise overhead
 - provide useful granularity
 - requires some filtering knowledge

Cisco ISP
Workshops

© 2005, Cisco Systems, Inc. All rights reserved.

19

Egress Traffic

- How packets leave your network
 - Egress traffic depends on:
 - route availability (what others send you)
 - route acceptance (what you accept from others)
 - policy and tuning (what you do with routes from others)
- Peering and transit agreements

Cisco ISP
Workshops

© 2005, Cisco Systems, Inc. All rights reserved.

20

Ingress Traffic


- How packets get to your network and your customers' networks
- Ingress traffic depends on:
 - what information you send and to whom
 - based on your addressing and AS's
 - based on others' policy (what they accept from you and what they do with it)

Cisco ISP
Workshops

© 2005, Cisco Systems, Inc. All rights reserved.

21

Autonomous System (AS)



- Collection of networks with same routing policy
- Single routing protocol
- Usually under single ownership, trust and administrative control

Cisco ISP
Workshops

© 2005, Cisco Systems, Inc. All rights reserved.

22

Definition of terms


- **Neighbours**
 - AS's which directly exchange routing information
 - Routers which exchange routing information
- **Announce**
 - send routing information to a neighbour
- **Accept**
 - receive and use routing information sent by a neighbour
- **Originate**
 - insert routing information into external announcements (usually as a result of the IGP)
- **Peers**
 - routers in neighbouring AS's or within one AS which exchange routing and policy information

Cisco ISP
Workshops

© 2005, Cisco Systems, Inc. All rights reserved.

23

Routing flow and packet flow



For networks in AS1 and AS2 to communicate:

- AS1 must announce to AS2
- AS2 must accept from AS1
- AS2 must announce to AS1
- AS1 must accept from AS2

Cisco ISP
Workshops

© 2005, Cisco Systems, Inc. All rights reserved.

24

Routing flow and Traffic flow

- Traffic flow is always in the opposite direction of the flow of Routing information

Filtering outgoing routing information inhibits traffic flow inbound


Filtering inbound routing information inhibits traffic flow outbound

Cisco ISP
Workshops

© 2005, Cisco Systems, Inc. All rights reserved.

25

Routing Flow/Packet Flow: With multiple ASes



For net N1 in AS1 to send traffic to net N16 in AS16:

- AS16 must originate and announce N16 to AS8.
- AS8 must accept N16 from AS16.
- AS8 must announce N16 to AS1 or AS34.
- AS1 must accept N16 from AS8 or AS34.


For two-way packet flow, similar policies must exist for N1.

Cisco ISP
Workshops

© 2005, Cisco Systems, Inc. All rights reserved.

26

Routing Flow/Packet Flow: With multiple ASes



As multiple paths between sites are implemented it is easy to see how policies can become quite complex.

Cisco ISP
Workshops

© 2005, Cisco Systems, Inc. All rights reserved.

27

Routing Policy

- Used to control traffic flow in and out of an ISP network
- ISP makes decisions on what routing information to accept and discard from its neighbours

Individual routes

Routes originated by specific ASes

Routes traversing specific ASes

Routes belonging to other groupings


Groupings which you define as you see fit

Cisco ISP
Workshops

© 2005, Cisco Systems, Inc. All rights reserved.

28

Routing Policy Limitations

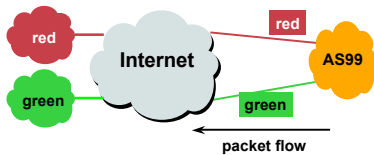


- AS99 uses red link for traffic to the red AS and the green link for remaining traffic
- To implement this policy, AS99 has to:
 - Accept routes originating from the red AS on the red link
 - Accept all other routes on the green link

Cisco ISP
Workshops

© 2005, Cisco Systems, Inc. All rights reserved.

29

Routing Policy Limitations

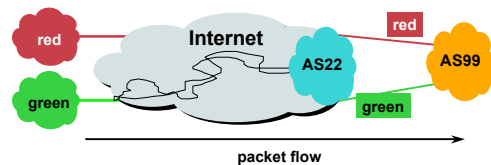

- AS99 would like packets coming from the green AS to use the green link.
- But unless AS22 cooperates in pushing traffic from the green AS down the green link, there is very little that AS99 can do to achieve this aim

Cisco ISP
Workshops

© 2005, Cisco Systems, Inc. All rights reserved.

30

Routing Policy Issues

- 167000 prefixes (not realistic to set policy on all of them individually)
- 20000 origin AS's (too many)
- routes tied to a specific AS or path may be unstable regardless of connectivity
- groups of AS's are a natural abstraction for filtering purposes



Routing Protocols

We now know what routing means...
...but what do the routers get up to?
And why are we doing this anyway?

1: How Does Routing Work?

- Internet is made up of the ISPs who connect to each other's networks
- How does an ISP in Kenya tell an ISP in Japan what customers they have?
- And how does that ISP send data packets to the customers of the ISP in Japan, and get responses back

After all, as on a local ethernet, two way packet flow is needed for communication between two devices

2: How Does Routing Work?

- ISP in Kenya could buy a direct connection to the ISP in Japan
 - But this doesn't scale – thousands of ISPs, would need thousands of connections, and cost would be astronomical
- Instead, ISP in Kenya tells his neighbouring ISPs what customers he has
 - And the neighbouring ISPs pass this information on to their neighbours, and so on
 - This process repeats until the information reaches the ISP in Japan

3: How Does Routing Work?

- This process is called "Routing"
- The mechanisms used are called "Routing Protocols"
- Routing and Routing Protocols ensures that the Internet can scale, that thousands of ISPs can provide connectivity to each other, giving us the Internet we see today

4: How Does Routing Work?

- ISP in Kenya doesn't actually tell his neighbouring ISPs the names of the customers (network equipment does not understand names)
- Instead, he has received an IP address block as a member of the Regional Internet Registry serving Kenya
 - His customers have received address space from this address block as part of their "Internet service"
 - And he announces this address block to his neighbouring ISPs – this is called announcing a "route"

Routing Protocols

- Routers use “routing protocols” to exchange routing information with each other

IGP is used to refer to the process running on routers inside an ISP's network

EGP is used to refer to the process running between routers bordering directly connected ISP networks

Cisco ISP
Workshops

© 2009, Cisco Systems, Inc. All rights reserved.

37

What Is an IGP?

- Interior **G**ateway **P**rotocol
- Within an Autonomous System
- Carries information about internal infrastructure prefixes
- Examples – OSPF, ISIS, EIGRP

Cisco ISP
Workshops

© 2009, Cisco Systems, Inc. All rights reserved.

38

Why Do We Need an IGP?

- ISP backbone scaling

Hierarchy

Limiting scope of failure

Only used for ISP's **infrastructure** addresses, not customers or anything else

Design goal is to **minimise** number of prefixes in IGP to aid scalability and rapid convergence

Cisco ISP
Workshops

© 2009, Cisco Systems, Inc. All rights reserved.

39

What Is an EGP?

- Exterior **G**ateway **P**rotocol
- Used to convey routing information between Autonomous Systems
- De-coupled from the IGP
- Current EGP is BGP

Cisco ISP
Workshops

© 2009, Cisco Systems, Inc. All rights reserved.

40

Why Do We Need an EGP?

- Scaling to large network
 - Hierarchy
 - Limit scope of failure
- Define Administrative Boundary
- Policy
 - Control reachability of prefixes
 - Merge separate organizations
 - Connect multiple IGPs

Cisco ISP
Workshops

© 2009, Cisco Systems, Inc. All rights reserved.

41

Interior versus Exterior Routing Protocols

- | | |
|----------------------------------|----------------------------------|
| • Interior | • Exterior |
| automatic neighbour discovery | specifically configured peers |
| generally trust your IGP routers | connecting with outside networks |
| prefixes go to all IGP routers | set administrative boundaries |
| binds routers in one AS together | binds AS's together |

Cisco ISP
Workshops

© 2009, Cisco Systems, Inc. All rights reserved.

42

Interior versus Exterior Routing Protocols


- **Interior**
 - Carries ISP infrastructure addresses only
 - ISPs aim to keep the IGP small for efficiency and scalability
- **Exterior**
 - Carries customer prefixes
 - Carries Internet prefixes
 - EGPs are independent of ISP network topology

Cisco ISP Workshops

© 2008, Cisco Systems, Inc. All rights reserved.

43

Hierarchy of Routing Protocols

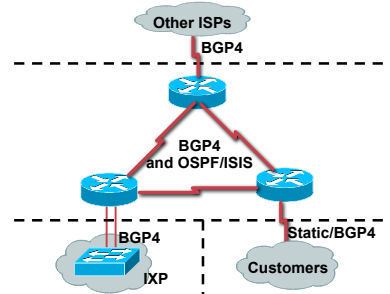

Cisco ISP Workshops

© 2008, Cisco Systems, Inc. All rights reserved.

44

FYI: IOS Default Administrative Distances

| Route Source | Default Distance |
|-----------------------------|------------------|
| Connected Interface | 0 |
| Static Route | 1 |
| Enhanced IGRP Summary Route | 5 |
| External BGP | 20 |
| Internal Enhanced IGRP | 90 |
| IGRP | 100 |
| OSPF | 110 |
| IS-IS | 115 |
| RIP | 120 |
| EGP | 140 |
| External Enhanced IGRP | 170 |
| Internal BGP | 200 |
| Unknown | 255 |

Cisco ISP Workshops

© 2008, Cisco Systems, Inc. All rights reserved.

45



Routing Basics

ISP/IXP Workshops

Cisco ISP Workshops

© 2008, Cisco Systems, Inc. All rights reserved.

46