

# Netflow, Flow-tools tutorial

Gaurab Raj Upadhyaya

# Agenda

- Agenda bashing
  - Do you want to see the labs, or want to discuss issues
- Netflow
  - What it is and how it works
  - Uses and Applications
- Vendor Configurations/ Implementation
  - Cisco and Juniper
- Flow-tools
  - Architectural issues
  - Software, tools etc

# Net-flow


# Network Flows

- Packets or frames that have a common attribute.
- Creation and expiration policy – what conditions start and stop a flow.
- Counters – packets,bytes,time.
- Routing information – AS, network mask, interfaces.

# Network Flows

- Unidirectional or bidirectional.
- Bidirectional flows can contain other information such as round trip time, TCP behavior.
- Application flows look past the headers to classify packets by their contents.
- Aggregated flows – flows of flows.


# Unidirectional Flow with Source/Destination IP Key

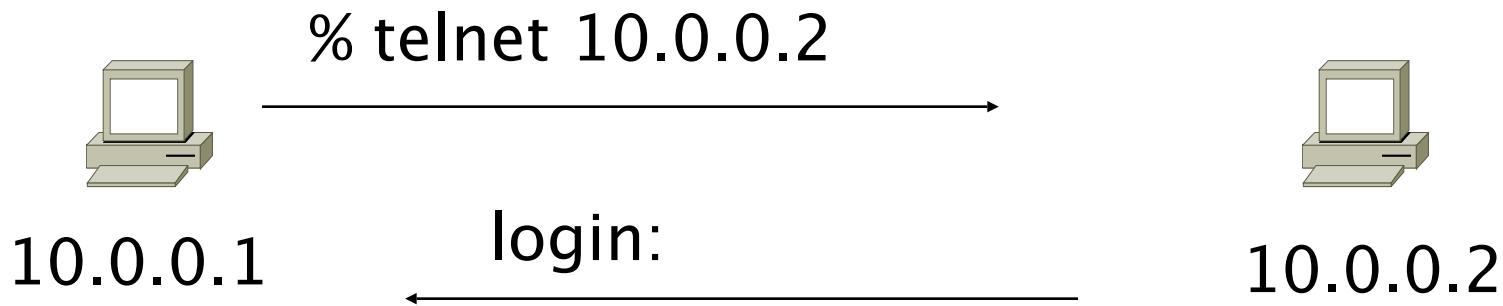

## Active Flows

Flow	Source IP	Destination IP
1	10.0.0.1	10.0.0.2
2	10.0.0.2	10.0.0.1


# Unidirectional Flow with Source/Destination IP Key

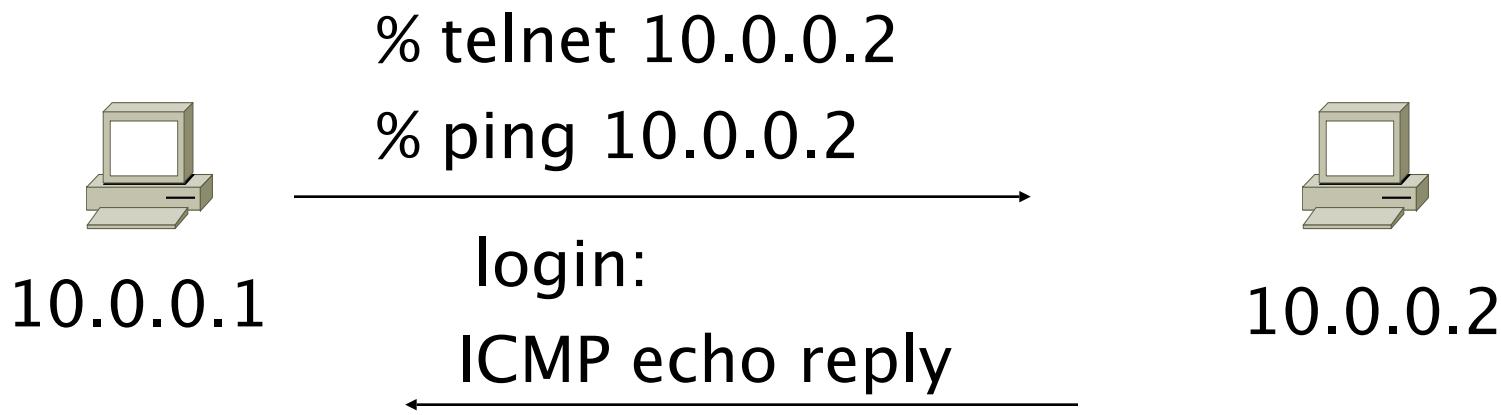

# Active Flows

Flow	Source IP	Destination IP
1	10.0.0.1	10.0.0.2
2	10.0.0.2	10.0.0.1


# Unidirectional Flow with IP, Port,Protocol Key

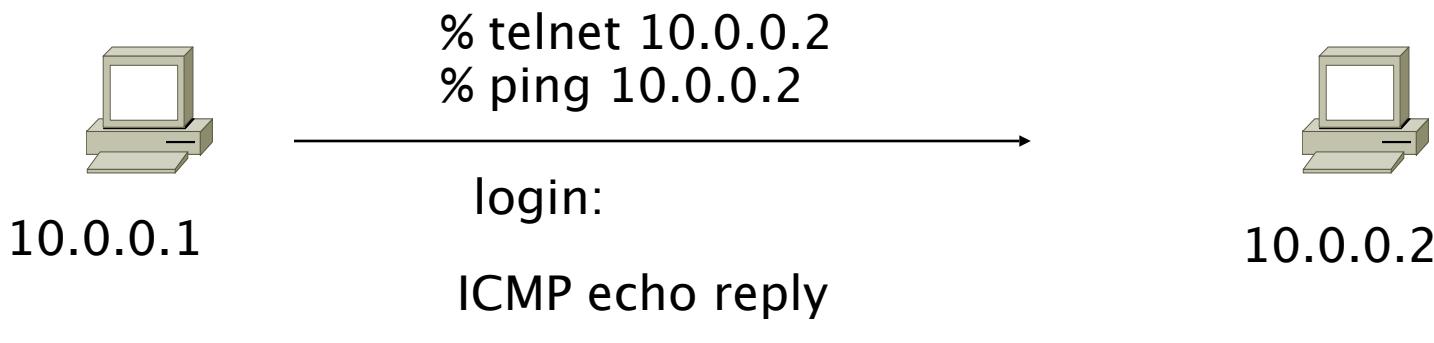

## Active Flows

Flow	Source IP	Destination IP	prot	srcPort	dstPort
1	10.0.0.1	10.0.0.2	TCP	32000	23
2	10.0.0.2	10.0.0.1	TCP	23	32000
3	10.0.0.1	10.0.0.2	ICMP	0	0
4	10.0.0.2	10.0.0.1	ICMP	0	0


# Bidirectional Flow with IP, Port,Protocol Key

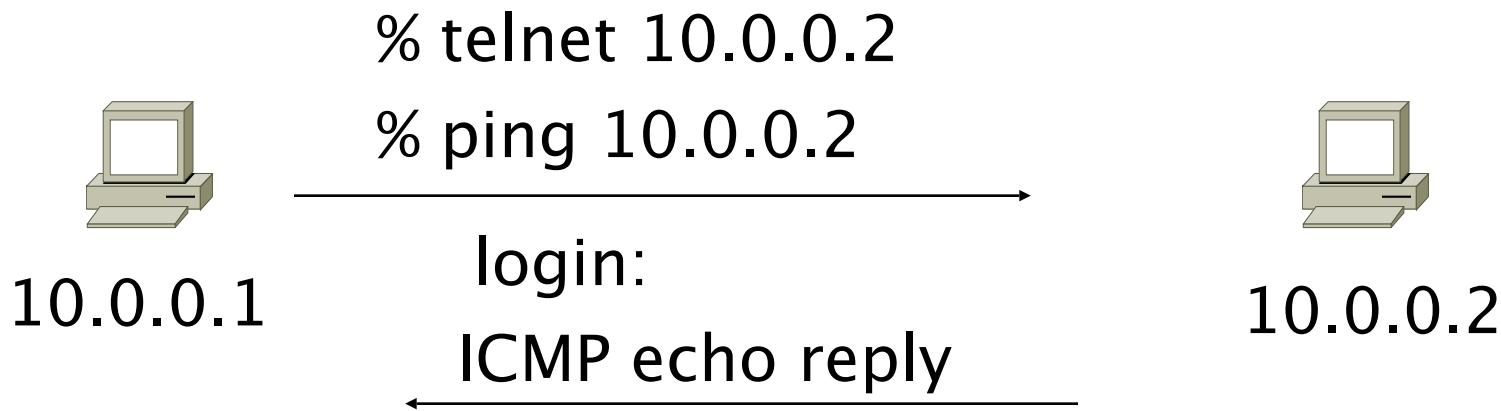

## Active Flows

Flow	Source IP dstPort	Destination IP	prot	srcPort
1	10.0.0.1	10.0.0.2	TCP	32000 23
2	10.0.0.1	10.0.0.2	ICMP	0 0

# Application Flow

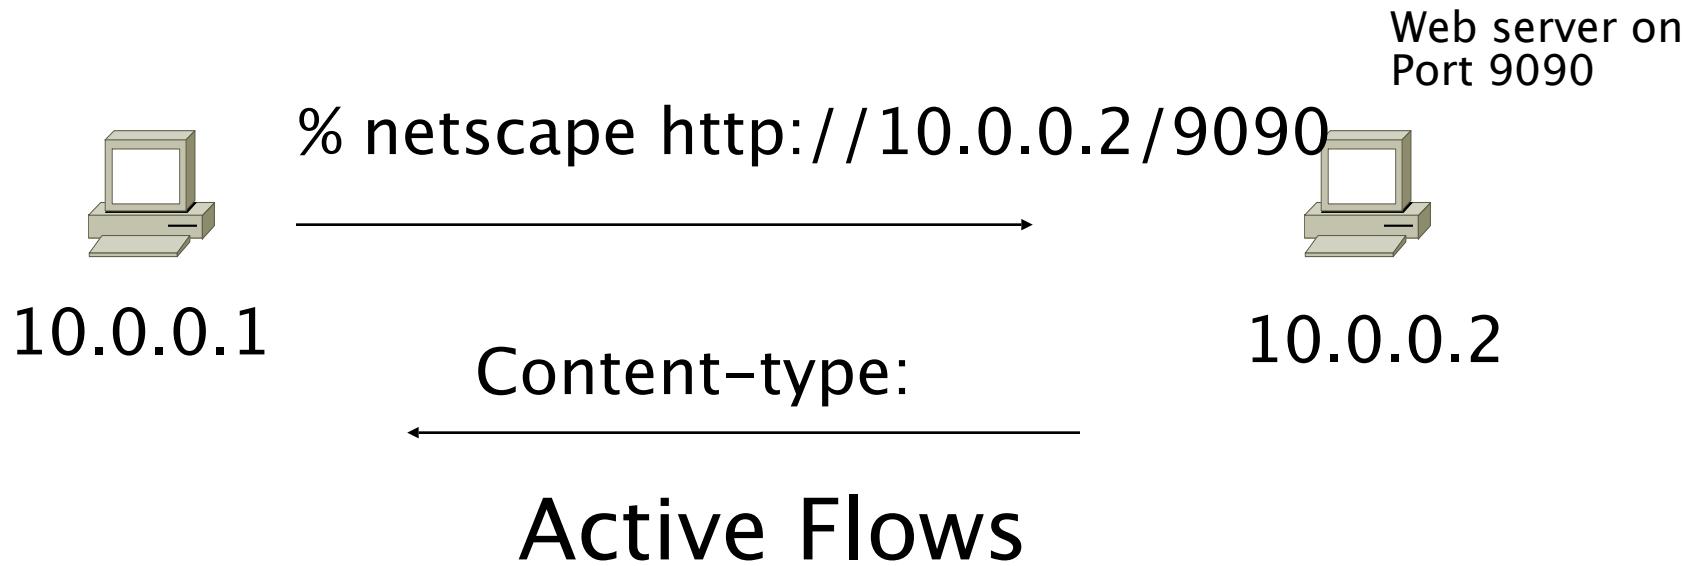

Flow	Source IP	Destination IP	Application
1	10.0.0.1	10.0.0.2	HTTP

# Aggregated Flow

## Main Active flow table

Flow	Source IP	Destination IP	prot	srcPort	dstPort
1	10.0.0.1	10.0.0.2	TCP	32000	23
2	10.0.0.2	10.0.0.1	TCP	23	
	32000				
3	10.0.0.1	10.0.0.2	ICMP	0	0
4	10.0.0.2	10.0.0.1	ICMP	0	0

## Source/Destination IP Aggregate

Flow	Source IP	Destination IP
1	10.0.0.1	10.0.0.2
2	10.0.0.2	10.0.0.1

# Working with Flows

- Generating and Viewing Flows
- Exporting Flows from devices
  - Types of flows
  - Sampling rates
- Collecting it
  - Tools to Collect Flows - Flow-tools
- Analyzing it
  - More tools available, can write your own

# Flow Descriptors

- A Key with more elements will generate more flows.
- Greater number of flows leads to more post processing time to generate reports, more memory and CPU requirements for device generating flows.
- Depends on application. Traffic engineering vs. intrusion detection.


# Flow Accounting

- Accounting information accumulated with flows.
- Packets, Bytes, Start Time, End Time.
- Network routing information - masks and autonomous system number.


# Flow Generation/Collection

- Passive monitor
  - A passive monitor (usually a unix host) receives all data and generates flows.
  - Resource intensive, newer investments needed
- Router or other existing network device.
  - Router or other existing devices like switch, generate flows.
  - Sampling is possible
  - Nothing new needed

# Passive Monitor Collection

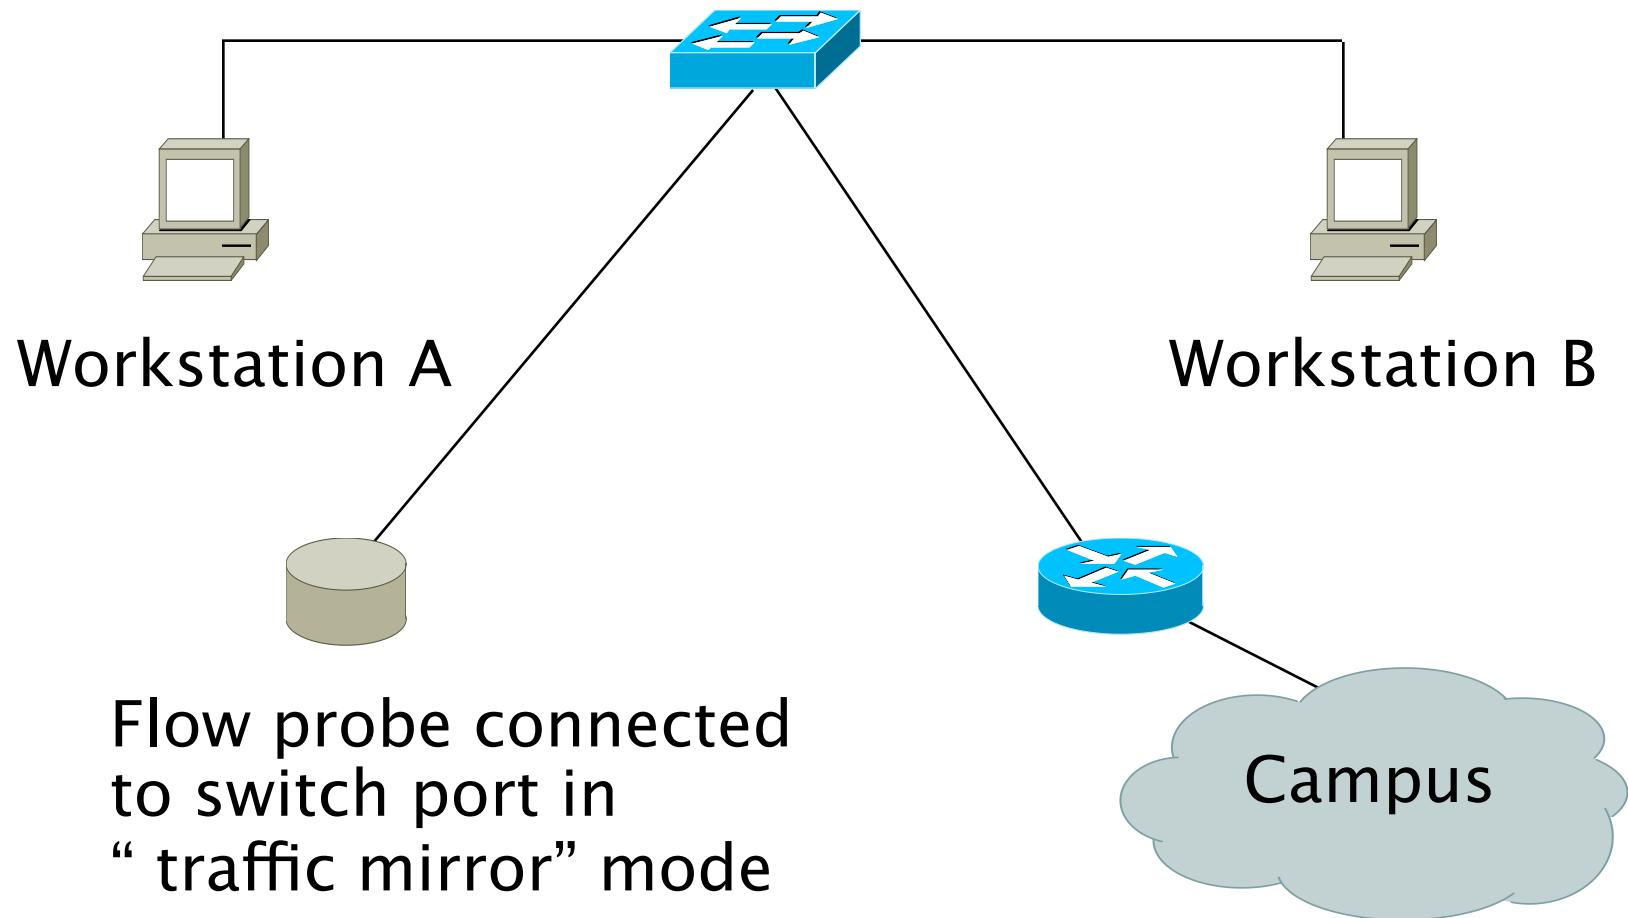

# Router Collection

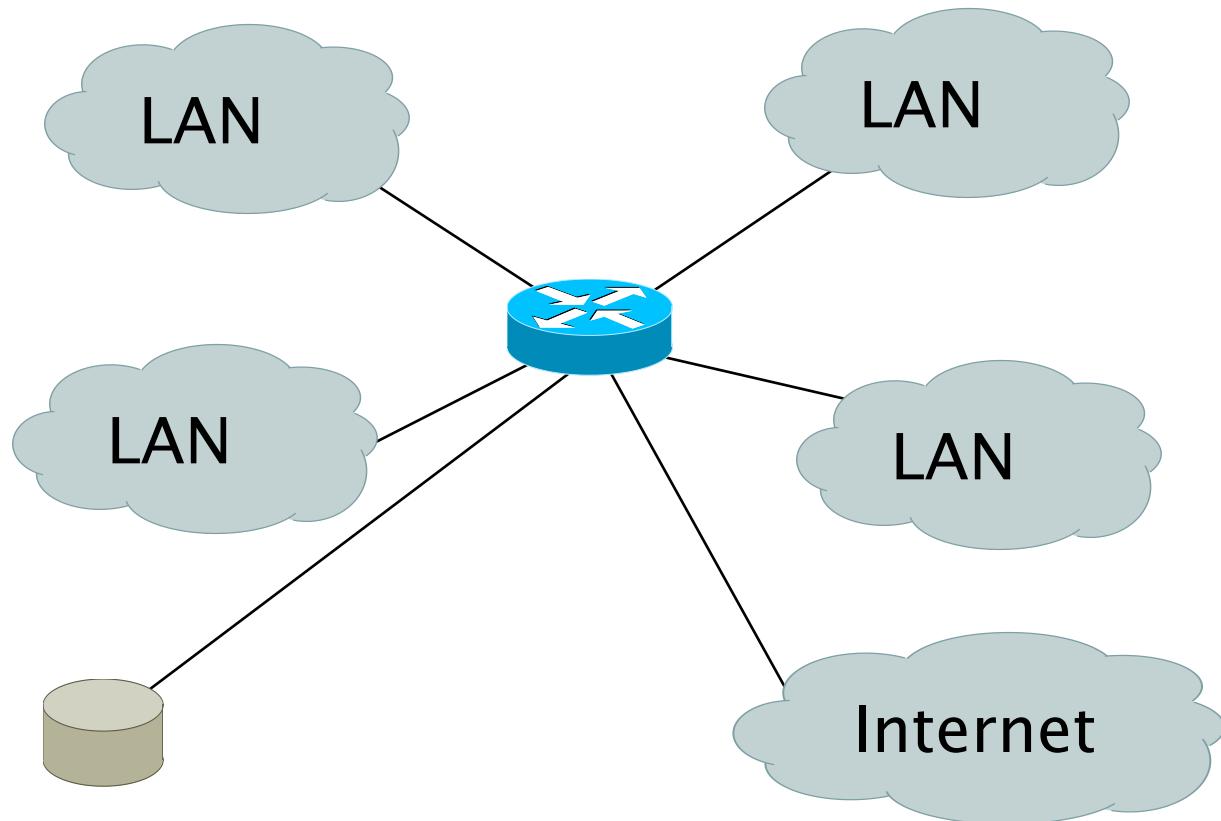

Flow collector  
stores exported flows from router.

# Passive Monitor

- Directly connected to a LAN segment via a switch port in “mirror” mode, optical splitter, or repeated segment.
- Generate flows for all local LAN traffic.
- Must have an interface or monitor deployed on each LAN segment.
- Support for more detailed flows – bidirectional and application.

# Router Collection

- Router will generate flows for traffic that is directed to the router.
- Flows are not generated for local LAN traffic.
- Limited to “simple” flow criteria (packet headers).
- Generally easier to deploy – no new equipment.

# Vendor implementations

# Cisco NetFlow

- Unidirectional flows.
- IPv4 unicast and multicast.
- Aggregated and unaggregated.
- Flows exported via UDP.
- Supported on IOS and CatIOS platforms.
- Catalyst NetFlow is different implementation.

# Cisco NetFlow Versions

- 4 Unaggregated types (1,5,6,7).
- 14 Aggregated types (8.x).
- Each version has its own packet format.
- Version 1 does not have sequence numbers – no way to detect lost flows.
- The “version” defines what type of data is in the flow.
- Some versions specific to Catalyst platform.

# NetFlow v1

- Key fields: Source/Destination IP, Source/Destination Port, IP Protocol, ToS, Input interface.
- Accounting: Packets, Octets, Start/End time, Output interface
- Other: Bitwise OR of TCP flags.

# NetFlow v5

- Key fields: Source/Destination IP, Source/Destination Port, IP Protocol, ToS, Input interface.
- Accounting: Packets, Octets, Start/End time, Output interface.
- Other: Bitwise OR of TCP flags, Source/Destination AS and IP Mask.
- Packet format adds sequence numbers for detecting lost exports.

# NetFlow v8

- Aggregated v5 flows.
- 3 Catalyst 65xx specific that correspond to the configurable flow mask.
- Much less data to post process, but lose fine granularity of v5 - no IP addresses.

# NetFlow v8

- AS
- Protocol/Port
- Source Prefix
- Destination Prefix
- Prefix
- Destination (Catalyst 65xx)
- Source/Destination (Catalyst 65xx)
- Full Flow (Catalyst 65xx)


# NetFlow v8

- ToS/AS
- ToS/Protocol/Port
- ToS/Source Prefix
- ToS/Destination Prefix
- Tos/Source/Destination Prefix
- ToS/Prefix/Port

# NetFlow Packet Format

- Common header among export versions.
- All but v1 have a sequence number.
- Version specific data field where N records of data type are exported.
- N is determined by the size of the flow definition. Packet size is kept under ~1480 bytes. No fragmentation on Ethernet.

# NetFlow v5 Packet Example

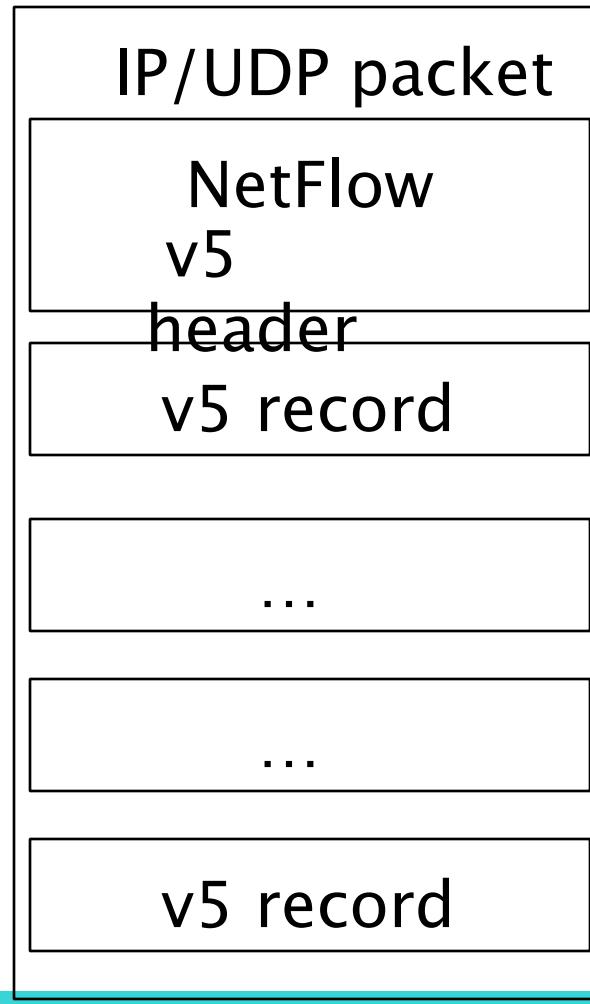


# NetFlow v5 Packet (Header)

```
struct fpt pdu_v5 {  
    /* 24 byte header */  
    u_int16 version;          /* 5 */  
    u_int16 count;            /* The number of records in the PDU */  
    u_int32 sysUpTime;        /* Current time in millisecs since router booted */  
    u_int32 unix_secs;        /* Current seconds since 0000 UTC 1970 */  
    u_int32 unix_nsecs;       /* Residual nanoseconds since 0000 UTC 1970 */  
    u_int32 flow_sequence;    /* Seq counter of total flows seen */  
    u_int8 engine_type;       /* Type of flow switching engine (RP,VIP,etc.) */  
    u_int8 engine_id;         /* Slot number of the flow switching engine */  
    u_int16 reserved;
```

# NetFlow v5 Packet (Records)

```
/* 48 byte payload */
struct ftrec_v5 {
    u_int32 srcaddr;          /* Source IP Address */
    u_int32 dstaddr;          /* Destination IP Address */
    u_int32 nexthop;          /* Next hop router's IP Address */
    u_int16 input;             /* Input interface index */
    u_int16 output;            /* Output interface index */
    u_int32 dPkts;            /* Packets sent in Duration */
    u_int32 dOctets;           /* Octets sent in Duration. */
    u_int32 First;              /* SysUptime at start of flow */
    u_int32 Last;               /* and of last packet of flow */
    u_int16 srcport;            /* TCP/UDP source port number or equivalent */
    u_int16 dstport;            /* TCP/UDP destination port number or equiv */
    u_int8 pad;
    u_int8 tcp_flags;           /* Cumulative OR of tcp flags */
    u_int8 prot;                /* IP protocol, e.g., 6=TCP, 17=UDP, ... */
    u_int8 tos;                  /* IP Type-of-Service */
    u_int16 src_as;              /* originating AS of source address */
    u_int16 dst_as;              /* originating AS of destination address */
    u_int8 src_mask;             /* source address prefix mask bits */
    u_int8 dst_mask;             /* destination address prefix mask bits */
    u_int16 drops;
} records[FT_PDU_V5_MAXFLOWS];
};
```

# NetFlow v8 Packet Example (AS Aggregation)

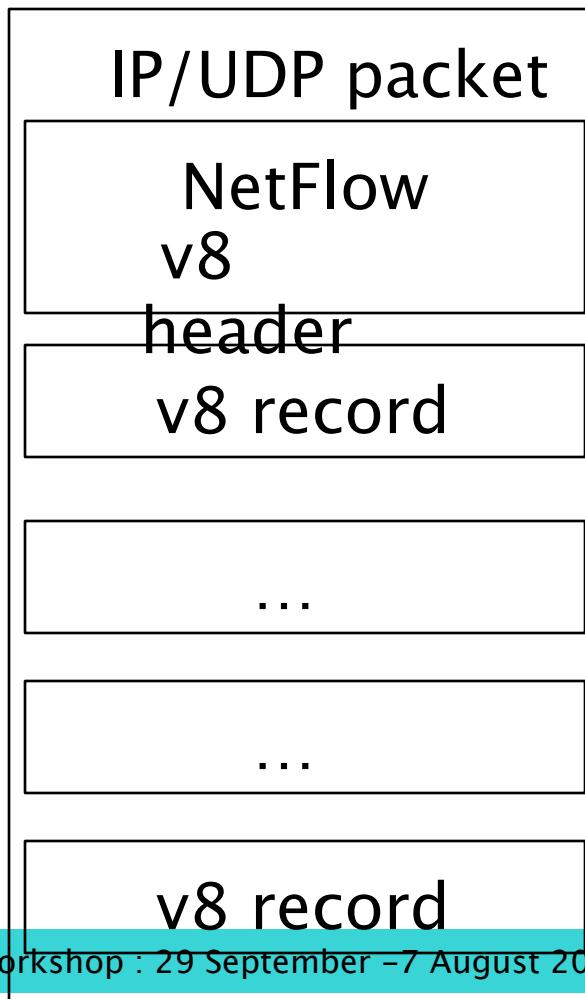

# NetFlow v8 AS agg. Packet

```
struct ftpdu_v8_1 {
    /* 28 byte header */
    u_int16 version;          /* 8 */
    u_int16 count;            /* The number of records in the PDU */
    u_int32 sysUpTime;        /* Current time in millisecs since router booted */
    u_int32 unix_secs;        /* Current seconds since 0000 UTC 1970 */
    u_int32 unix_nsecs;       /* Residual nanoseconds since 0000 UTC 1970 */
    u_int32 flow_sequence;    /* Seq counter of total flows seen */
    u_int8 engine_type;       /* Type of flow switching engine (RP,VIP,etc.) */
    u_int8 engine_id;         /* Slot number of the flow switching engine */
    u_int8 aggregation;       /* Aggregation method being used */
    u_int8 agg_version;       /* Version of the aggregation export */
    u_int32 reserved;
    /* 28 byte payload */
    struct ftrec_v8_1 {
        u_int32 dFlows;           /* Number of flows */
        u_int32 dPkts;            /* Packets sent in duration */
        u_int32 dOctets;          /* Octets sent in duration */
        u_int32 First;             /* SysUpTime at start of flow */
        u_int32 Last;              /* and of last packet of flow */
        u_int16 src_as;            /* originating AS of source address */
        u_int16 dst_as;            /* originating AS of destination address */
        u_int16 input;              /* input interface index */
        u_int16 output;             /* output interface index */
    } records[FT_PDU_V8_1_MAXFLOWS];
};
```

# Cisco IOS Configuration

- Configured on each input interface.
- Define the version.
- Define the IP address of the collector (where to send the flows).
- Optionally enable aggregation tables.
- Optionally configure flow timeout and main (v5) flow table size.
- Optionally configure sample rate.

# Cisco IOS Configuration

```
interface FastEthernet0/0
    ip address 203.94.88.1 255.255.255.0
    no ip proxy-arp
    ip route-cache flow
    duplex auto
    speed auto
!
interface FastEthernet0/1
    ip address 203.94.89.1 255.255.255.0
    no ip proxy-arp
    ip route-cache flow
    duplex auto
    speed auto

ip flow-export version 5 origin-as
ip flow-export destination 203.94.88.2 5004
ip flow-aggregation cache prefix
export destination 203.94.88.2 5555
enabled
```

# Cisco IOS Configuration

- Change in command in newer IOS

```
interface FastEthernet0/0
    ip route-cache flow      ! Prior to IOS 12.4
    ip flow [ingress|egress]  ! From IOS 12.4
```

- CEF is preferred else netflow helps in optimal switching
- With CEF, netflow becomes a information tool

# Cisco IOS Configuration

```
sanog_sri_lanka#sh ip flow export
Flow export v5 is enabled for main cache
Exporting flows to 203.94.88.2 (5004)
Exporting using source IP address 203.94.88.1
Version 5 flow records, origin-as
Cache for prefix aggregation:
    Exporting flows to 203.94.88.2 (5555)
    Exporting using source IP address 203.94.88.1
14042 flows exported in 506 udp datagrams
0 flows failed due to lack of export packet
0 export packets were sent up to process level
0 export packets were dropped due to no fib
0 export packets were dropped due to adjacency issues
0 export packets were dropped due to fragmentation failures
0 export packets were dropped due to encapsulation fixup failures
```

# Cisco IOS Configuration

```
sanog_sri_lanka#sh ip cache flow
IP packet size distribution (37483277 total packets):
 1-32   64   96   128   160   192   224   256   288   320   352   384   416   448   480
 .002 .530 .053 .021 .008 .004 .016 .002 .001 .002 .001 .002 .004 .002 .002

 512   544   576  1024  1536  2048  2560  3072  3584  4096  4608
 .009 .003 .006 .013 .308 .000 .000 .000 .000 .000 .000 .000

IP Flow Switching Cache, 278544 bytes
213 active, 3883 inactive, 7519099 added
150463429 ager polls, 0 flow alloc failures
Active flows timeout in 30 minutes
Inactive flows timeout in 15 seconds

IP Sub Flow Cache, 21640 bytes
213 active, 811 inactive, 14698 added, 14698 added to flow
0 alloc failures, 0 force free
1 chunk, 3 chunks added
last clearing of statistics never
```

# Cisco IOS Configuration

Protocol	Total	Flows	Packets	Bytes	Packets	Active(Sec)	Idle(Sec)
	Flows	/Sec	/Flow	/Pkt	/Sec	/Flow	/Flow
TCP-Telnet	307	0.0	50	55	0.0	19.9	12.9
TCP-FTP	2250	0.0	10	88	0.0	5.7	6.8
TCP-FTPD	552	0.0	458	933	0.4	9.3	2.9
TCP-WWW	5178673	9.8	4	577	43.7	5.2	14.0
TCP-SMTP	55358	0.1	18	72	1.9	9.8	4.4
TCP-X	15828	0.0	1	40	0.0	0.0	15.3
TCP-NNTP	76	0.0	1	58	0.0	2.9	12.2
TCP-Frag	137	0.0	1	40	0.0	0.0	15.5
TCP-other	953957	1.8	9	522	16.8	4.1	13.4
UDP-DNS	15916	0.0	2	66	0.0	3.2	15.5
UDP-NTP	943	0.0	1	76	0.0	0.0	15.5
UDP-Frag	76	0.0	1	315	0.0	0.4	15.4
UDP-other	979044	1.8	3	344	6.1	0.7	15.5
ICMP	315068	0.6	2	64	1.3	1.7	15.4
IP-other	1671	0.0	265	453	0.8	53.3	15.3
Total:	7519856	14.3	4	520	71.5	4.4	14.1

SrcIf	SrcIPaddress	DstIf	DstIPaddress	Pr	SrcP	DstP	Pkts
Se7/1:1	66.199.224.39	Null	203.94.89.22	06	94E8	0050	4
Se7/1:1	121.23.95.181	Null	203.94.88.192	06	0E15	0050	3
Se7/1:1	64.56.64.123	Null	203.94.89.5	06	0862	0050	2
Se7/1:1	24.86.44.68	Fa0/1	203.94.89.104	11	890E	DB36	1
Se7/1:1	64.56.64.123	Null	203.94.89.32	06	0815	0050	2
Se7/1:1	64.56.64.123	Null	203.94.89.34	06	0816	0050	2
Se7/1:1	64.56.64.123	Null	203.94.89.33	06	0814	0050	2

# Cisco IOS Configuration

```
ip flow-top-talkers  
top 10  
sort-by bytes  
cache-timeout 3000
```

```
sanog_sri_lanka#sh ip flow top-talkers
```

SrcIf	SrcIPaddress	DstIf	DstIPaddress	Pr	SrcP	DstP	Bytes
Se7/1:1	64.224.10.20	Fa0/0	203.94.88.203	06	0050	0877	165K
Se7/1:1	64.224.10.20	Fa0/0	203.94.88.203	06	0050	0876	110K
Se7/1:1	213.200.111.46	Fa0/0	203.94.88.93	06	0050	0612	57K
Fa0/0	203.94.88.2	Local	203.94.88.1	01	0000	0303	46K
Se7/1:1	213.200.111.56	Fa0/0	203.94.88.93	06	0050	0610	24K
Se7/1:1	83.57.179.179	Fa0/1	203.94.89.14	06	0E8E	0050	22K
Se7/1:1	213.200.111.46	Fa0/0	203.94.88.93	06	0050	0613	21K
Fa0/1	203.94.89.93	Null	203.94.89.255	11	0436	0089	20K
Fa0/1	203.94.89.14	Local	203.94.89.1	06	DF1E	0017	16K
Se7/1:1	83.57.179.179	Null	203.94.89.197	06	ODCF	0050	11K

10 of 10 top talkers shown. 248 flows processed.

# Cisco command summary

- Enable CEF
  - `ip cef`
- Enable flow on each interface
  - `ip route cache flow` OR
  - `ip flow ingress`
  - `ip flow egress`
- View flows
  - `show ip cache flow`
  - `show ip flow top-talkers`

# Cisco Command Summary

- Exporting Flows to a collector

```
ip flow-export version 5 [origin-as|peer-as]
ip flow-export destination x.x.x.x <udp-port>
```

- Exporting aggregated flows

```
ip flow-aggregation cache as|prefix|dest|source|proto
enabled
export destination x.x.x.x <udp-port>
```

# Juniper Configuration

- Sample packets with firewall filter and forward to routing engine.
- Sampling rate is limited to 7000pps. Fine for traffic engineering, but restrictive for DoS and intrusion detection.
- Juniper calls NetFlow cflowd.

# Juniper Configuration

Firewall filter

```
firewall {
    filter all {
        term all {
            then {
                sample;
                accept;
            }
        }
    }
}
```

Enable sampling / flows

```
forwarding-options {
    sampling {
        input {
            family inet {
                rate 100;
            }
        }
        output {
            cflowd 10.0.0.16{
                port 2055;
                version 5;
            }
        }
    }
}
```

# Juniper Configuration

Apply firewall filter to each interface.

```
interfaces {
    ge-0/3/0 {
        unit 0 {
            family inet {
                filter {
                    input all;
                    output all;
                }
                address 192.148.244.1/24;
            }
        }
    }
}
```

# Flows and Applications

# Uses for Flow

- Problem identification / solving
  - Traffic classification
  - DoS Traceback (some slides by Danny McPherson)
- Traffic Analysis
  - Inter-AS traffic analysis
  - Reporting on application proxies
- Accounting
  - Cross verification from other sources
  - Can cross-check with SNMP data

# Traffic Classification

- Based on Protocol, source and destination ports
  - Protocol identification (TCP, UDP, ICMP)
  - Can define well known ports
  - Can identify well known P2P ports
  - Most common use
    - Proxy measurement - http , ftp
    - Rate limiting P2P traffic

# Traceback: Flow-based\*

- Trace attack by matching fingerprint/signature at each interface via passive monitoring:
  - Flow data (e.g., NetFlow, cflowd, sFlow, IPFIX)
  - Span Data
  - PSAMP (Packet Sampling, IETF PSAMP WG)
- Number of open source and commercial products evolving in market
- Non-intrusive, widely supported

# Flow-based Detection\*

- Monitor flows (i.e., Network and Transport Layer transactions) on the network and build baselines for what normal behavior looks like:
  - Per interface
  - Per prefix
  - Per Transport Layer protocol & ports
  - Build time-based buckets (e.g., 5 minutes, 30 minutes, 1 hours, 12 hours, day of week, day of month, day of year)

# Detect Anomalous Events: SQL “Slammer” Worm\*



# Flow-based Detection (cont)


\*

- Once baselines are built anomalous activity can be detected
  - Pure **rate-based** (pps or bps) anomalies may be legitimate or malicious
  - Many **misuse** attacks can be immediately recognized, even **without** baselines (e.g., TCP SYN or RST floods)
  - **Signatures** can also be defined to identify “interesting” transactional data (e.g., proto udp and port 1434 and 404 octets(376 payload) == slammer!)
  - Temporal compound signatures can be defined to detect with higher precision

# Flow-based Commercial Tools...\*

Anomaly 150228	Get Report:	<a href="#">PDF</a>	<a href="#">XML</a>
----------------	-------------	---------------------	---------------------

ID	Importance	Duration	Start Time	Direction	Type	Resource
150228	High 130.0% of 2 Kpps	17 mins	03:34, Aug 16	Incoming	Bandwidth (Profiled)	Microsoft 207.46.0.0/16 <a href="#">windowsupdate.com</a>

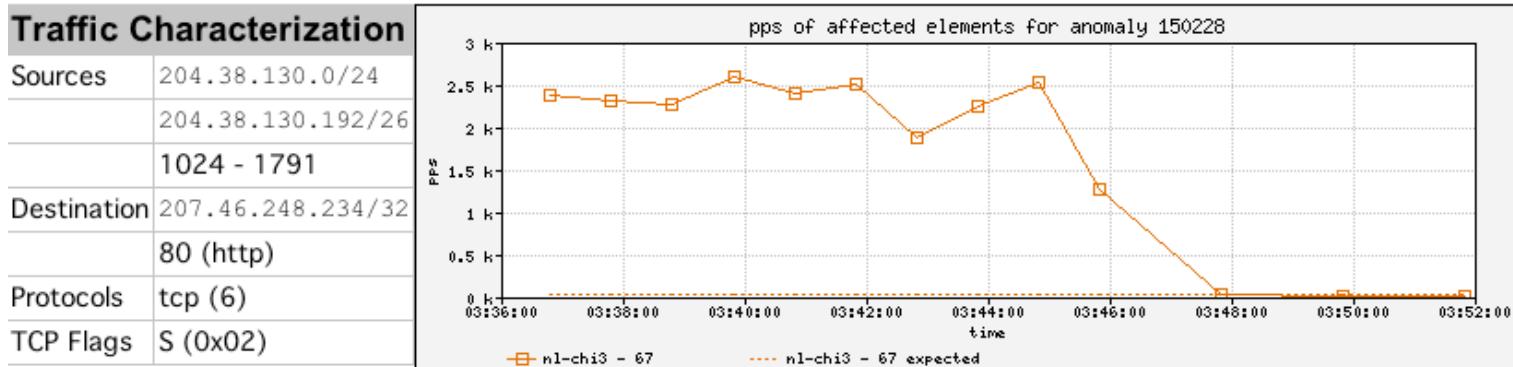

Affected Network Elements		Expected	Observed bps		Observed pps	
	Importance	pps	Max	Mean	Max	Mean
Router nl-chi3 198.110.131.125	High					
Interface 67 at-1/1/0.14 pvc to WMU		26	832 K	563.1 K	2.6 K	1.7 K

## Anomaly Comments

# Commercial Detection

## A Large Scale DOS attack\*

**[Peakflow DoS - BTWholesale]: Anomaly 14957 - Microsoft Internet Explorer provided by BT Configuration D**

File Edit View Favorites Tools Help

Anomaly 14957 Information

ID	Importance	Severity	Duration	Direction	Resource	Start Time	End Time	Class	Subclass
14957	High	108,759.0% of 300.00 Kbps	02h 04m 18s	Incoming	.bt.net- FastEthernet5/1 .1/32 BTnet-Core	21:05:23 BST 15 Jun 2003	23:09:41 BST 15 Jun 2003	Misuse	IP Fragmentation Anomaly

bps of affected elements for anomaly 14957

Affected Network Elements

Router core1-telehouse (195.99.120.112)		High			
	Triggering	Expected	Difference	Maximum	Mean
Bitrate				326.28 Mbps @ 21:14	116.31 Mbps
Packet Rate	31.36 Kpps	500 pps	30.86 Kpps	31.59 Kpps @ 21:14	11.36 Kpps

Interface 2 POS4/0 (FXCC200030 STM-16 direct fibre (not SDH) link to core1.ealing PO)		Maximum	Mean
	Bitrate	87.84 Mbps @ 21:15	27.17 Mbps
	Packet Rate	8.67 Kpps@ 21:15	2.72 Kpps

# Traceback: Commercial\*

Anomaly 150291

Get Report: [PDF](#) [XML](#)

ID	Importance	Duration	Start Time	Direction	Type	Resource
150291	<b>High</b> 124.6% of 40 Mbps	19 mins	09:16, Aug 17	Incoming	Protocol TCP (Profiled)	[REDACTED]

**Traffic Characterization**


Sources	136.165.56.151/32 69.1.194.74/32 0-4095
Destination	[REDACTED]
Protocols	tcp (6)
TCP Flags	AP (0x18) A (0x10)

**bps of affected elements for anomaly 150291**

**Affected Network Elements**

	Importance	Expected	Observed bps		Observed pps		<a href="#">Details</a>
		bps	Max	Mean	Max	Mean	
Router michnet8 198.108.90.125	<b>High</b>	7.2 M	49.9 M	38.7 M	5.3 K	4.2 K	<a href="#">Details</a>
Interface 127 ATM1/0.27-aa15 layer 198.108.22.181 <i>pvc to NL-PORT1</i>		-	3.3 K	1.2 K	5	2.4	<a href="#">Details</a>
Interface 145 GigabitEthernet5/0.22 - 802.1q vlan subinterface 198.108.23.153 <i>Nan to McAllin</i>		-	38.4 M	25.8 M	3.7 K	2.6 K	<a href="#">Details</a>
Interface 146 GigabitEthernet5/0.24 - 802.1q vlan subinterface 198.108.23.245 <i>CHI-ANN_Bin</i>		-	16.6 M	12.8 M	1.9 K	1.6 K	<a href="#">Details</a>
Router aa1 198.108.90.21	<b>High</b>	5.1 M	44.4 M	36.6 M	4.5 K	3.8 K	<a href="#">Details</a>
Interface 38 so-0/0/2.0.1 192.122.183.9 <i>pvc to Abilene Indianapolis</i>		-	34.0 M	24.0 M	3.0 K	2.2 K	<a href="#">Details</a>
Interface 39 so-0/0/2.0.2 63.149.0.186 <i>pvc to Qwest Chicago</i>		-	13.9 M	11.6 M	1.3 K	1.1 K	<a href="#">Details</a>
Interface 43 so-1/0/0.0 208.172.10.138 <i>OC3 to C&amp;W (Chicago)</i>		-	1.6 M	959.6 K	600	408.8	<a href="#">Details</a>
Interface 63 ge-0/0/1/0.11 198.108.90.17 <i>Nan to Comcast</i>		-	411.5 K	56.9 K	83.3	41.7	<a href="#">Details</a>

# Commercial Traceback: More Detail\*

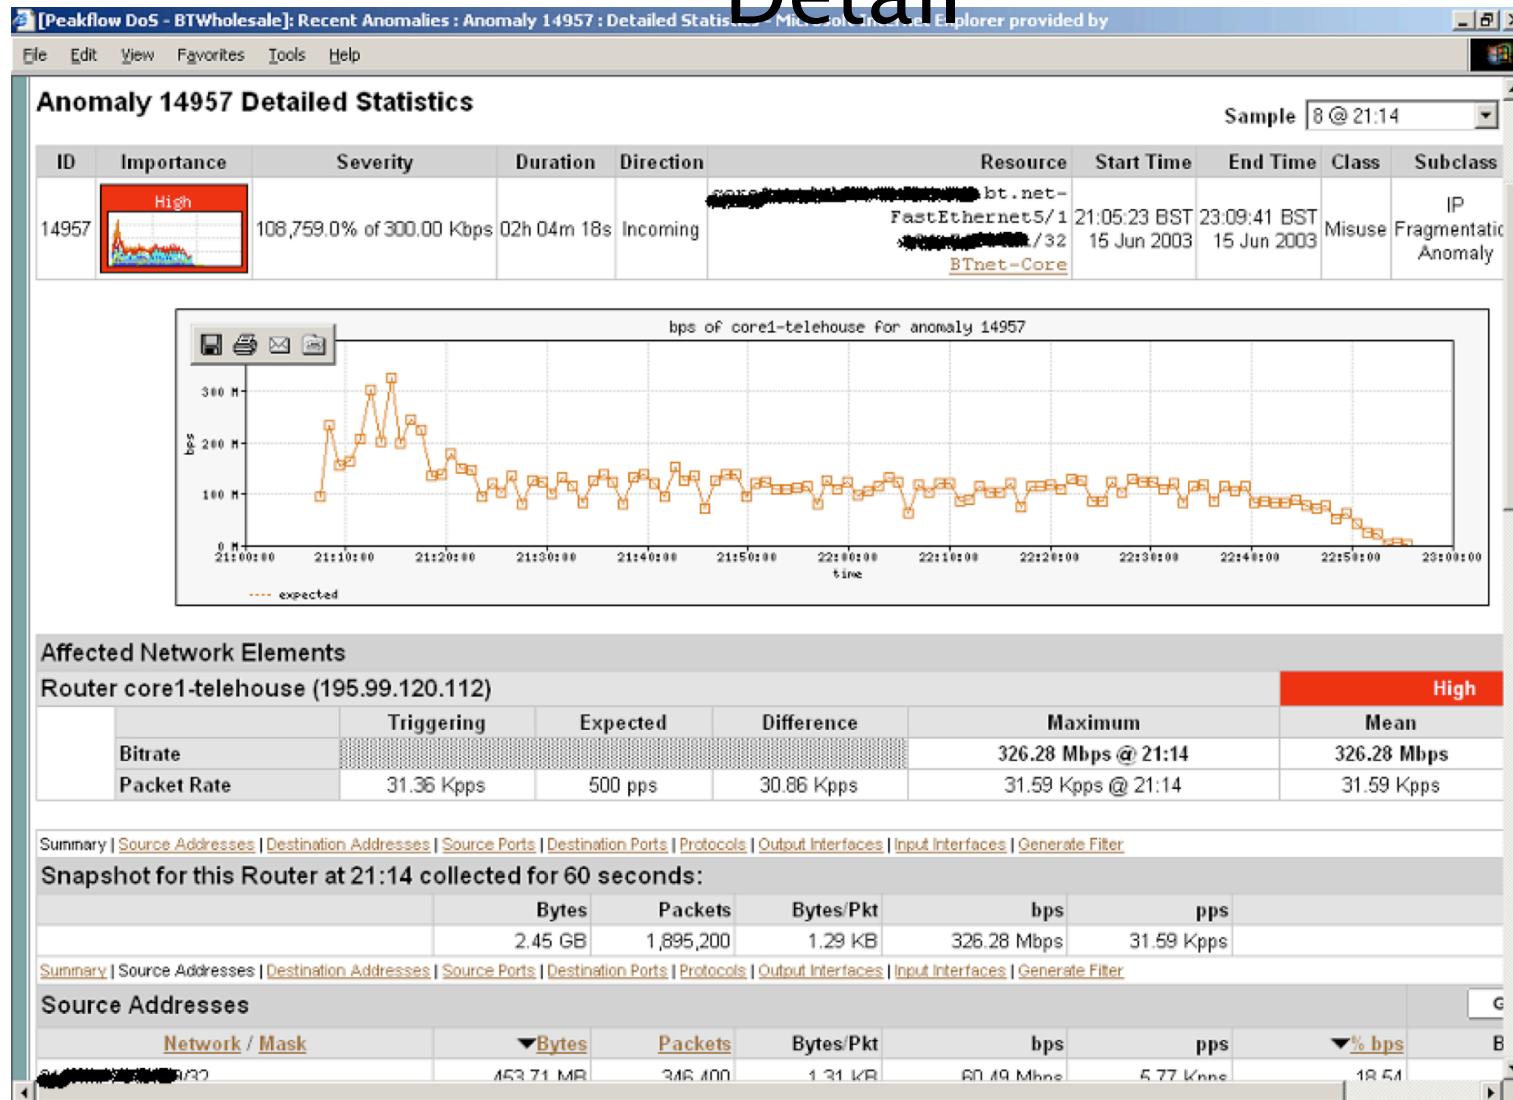


# Traffic Analysis

- Can see traffic based on source and destination AS
  - Source and destination AS derived through the routing table on the router
  - Introduces the need to run full mesh BGP at IXPs as well as transit and peering
  - Source and destination prefix based flows can be collected and plotted against external prefix to ASN data

# Accounting


- Flow based accounting can be a good supplement to SNMP based accounting.

# SNMP and Flows

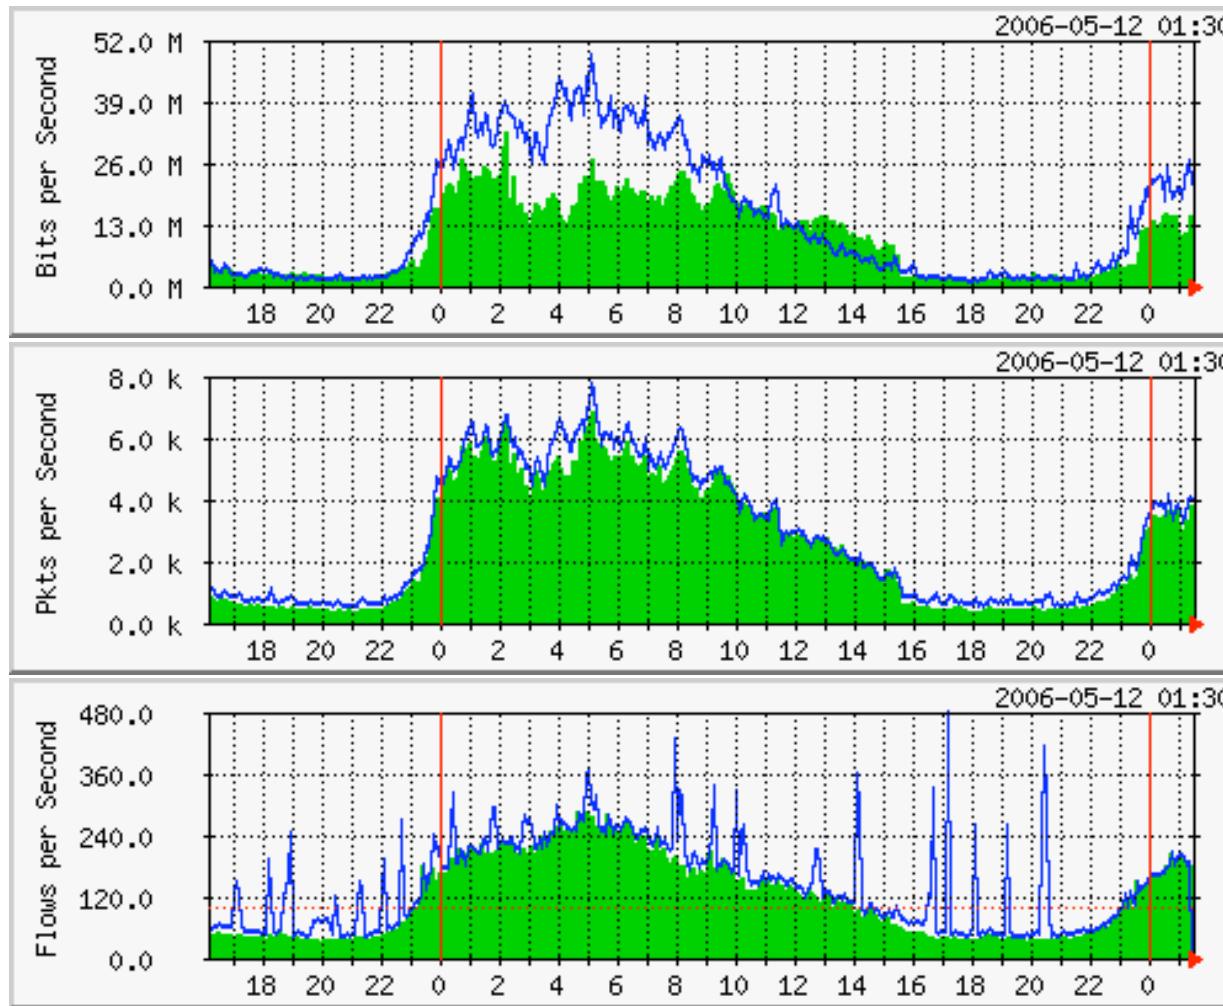


Data Courtesy AARNet, Australia and Bruce Morgan

# See the fine lines..

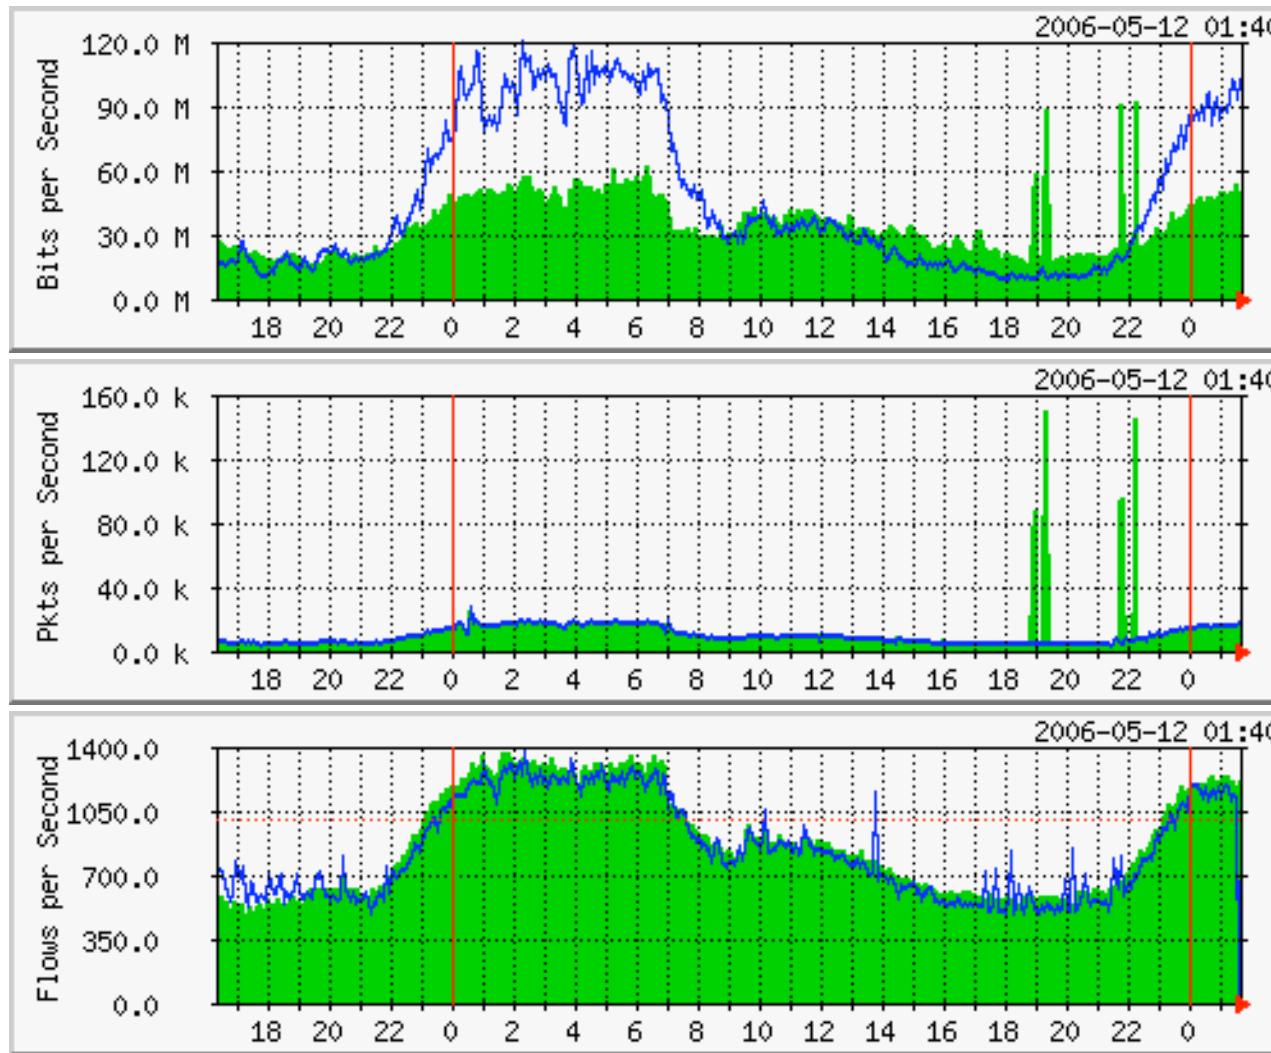

Data Courtesy AARNet, Australia and Bruce Morgan

# SNMP and Flows

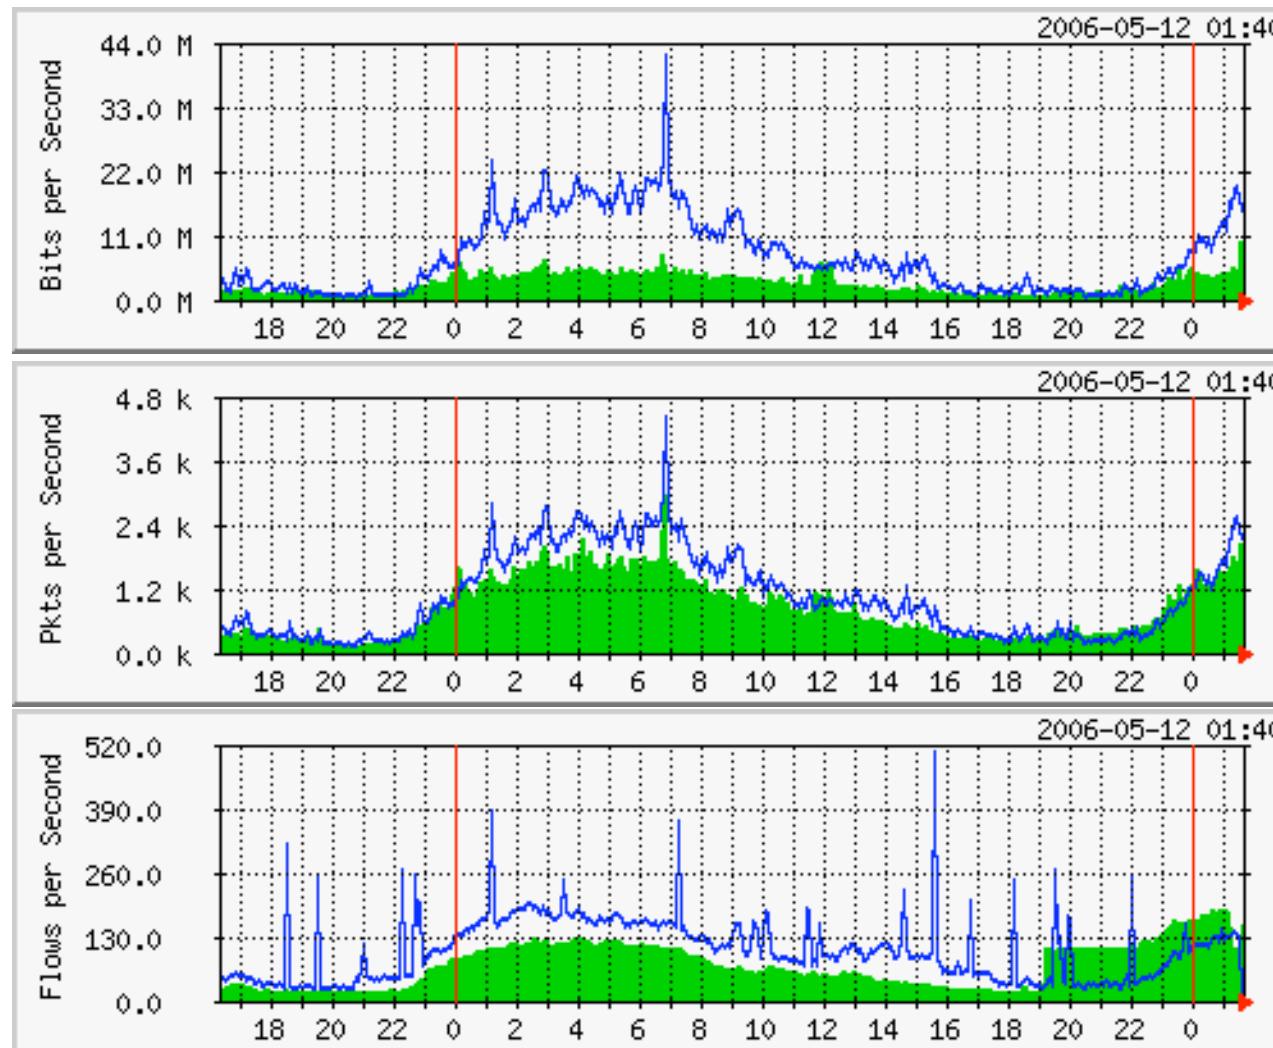

Data Courtesy AARNet, Australia and Bruce Morgan

# Flow-tools

- Collection of programs to post process Cisco NetFlow compatible flows.
- Written in C, designed to be fast (scales to large installations).
- Includes library (ftlib) for custom applications.
- Installation with  
configure;make;make install on

# flow-capture

- Collect NetFlow exports and stores to disk.
- Built in compression.
- Manages disk space by expiring older flow files at configurable limits.
- Detects lost flows by missing sequence numbers and stores with flow metadata.

# flow-fanout

- Replicate NetFlow UDP streams from one source to many destinations.
- Destination may be a multicast address.

# flow-expire

- Expire (remove) old flow files based on disk usage.
- Same functionality built in to flow-capture.
- Used when managing disk space in a distributed environment.

# Collector Placement and configuration

- NetFlow is UDP so the collector should ideally be directly connected to the router to minimize packet loss and IP spoofing risks.
- No flow control. Undersized collector will drop flows. Monitor netstat -s | grep buf and configure syslog so dropped flows will be logged.

# flow-print

- Formatted output of flow files.

```
eng1:~ flow-print < ft-v05.2002-01-21.093345-0500 | head -15
srcIP          dstIP          prot  srcPort  dstPort  octets packets
131.238.205.199 194.210.13.1    6     6346     40355   221      5
192.5.110.20   128.195.186.5   17    57040     33468   40       1
128.146.1.7    194.85.127.69   17     53       53      64       1
193.170.62.114 132.235.156.242  6     1453     1214     192      4
134.243.5.160  192.129.25.10   6     80       3360     654      7
132.235.156.242 193.170.62.114  6     1214     1453     160      4
130.206.43.51  130.101.99.107  6     3226     80       96       2
206.244.141.3  128.163.62.17   6     35593    80       739      10
206.244.141.3  128.163.62.17   6     35594    80       577      6
212.33.84.160  132.235.152.47  6     1447     1214     192      4
132.235.157.187 164.58.150.166  6     1214     56938    81       2
129.1.246.97   152.94.20.214   6     4541     6346     912      10
132.235.152.47 212.33.84.160   6     1214     1447     160      4
130.237.131.52 130.101.9.20   6     1246     80       902      15
```

# flow-cat

- Concat many flow files or directories of files.

```
eng1:~ ls  
ft-v05.2002-01-21.160001-0500 ft-v05.2002-01-21.170001-0500  
ft-v05.2002-01-21.161501-0500 ft-v05.2002-01-21.171501-0500  
ft-v05.2002-01-21.163001-0500 ft-v05.2002-01-21.173001-0500  
ft-v05.2002-01-21.164501-0500 tmp-v05.2002-01-21.174501-0500
```

```
eng1:~ flow-cat . | flow-print
```

srcIP	dstIP	prot	srcPort	dstPort	octets	packets
138.26.220.46	192.5.110.20	17	62242	33456	40	1
143.105.55.23	18.123.66.15	17	41794	41794	40	1
129.15.134.66	164.107.69.33	6	1214	2222	4500	3
132.235.170.19	152.30.96.188	6	6346	1475	128	3

# flow-merge

- Flow-merge is similar to flow-cat except it maintains relative ordering of flows when combining the files.
- Typically used when combining flows from multiple collectors.

# flow-filter

- Filter flows based on port, protocol, ASN, IP address, ToS bits, TCP bits, and tags.

```
eng1% flow-cat . | flow-filter -P119 | flow-print | head -10
```

srcIP	dstIP	prot	srcPort	dstPort	octets	packets
155.52.46.50	164.107.115.4	6	33225	119	114	2
128.223.220.29	129.137.4.135	6	52745	119	1438382	1022
155.52.46.50	164.107.115.4	6	33225	119	374	6
164.107.115.4	192.58.107.160	6	60141	119	5147961	8876
128.223.220.29	129.137.4.135	6	52745	119	1356325	965
128.223.220.29	129.137.4.135	6	52714	119	561016	398
130.207.244.18	129.22.8.64	6	36033	119	30194	121
155.52.46.50	164.107.115.4	6	33225	119	130	2
198.108.1.146	129.137.4.135	6	17800	119	210720652	216072

# flow-split

- Split flow files into smaller files.
- Typically used with flow-stat and graphing. For example if flow files are 1 hour and want 5 minute data points in graph, flow-split can take the 1 hour flow files and generate 5 minute files.

# flow-tag

- Adds a tag field to flows based on IP exporter, IP prefix, Autonomous System, or next hop.
- Like flow-filter used with other tools.
- Used to manage groups of prefixes or ASN's.

# flow-header

- Display meta information in flow

```
eng1:% flow-header < ft-v05.2002-01-21.093345-0500
#
# mode:          normal
# capture hostname: eng1.oar.net
# exporter IP address: 0.0.0.0
# capture start:    Mon Jan 21 09:33:45 2002
# capture end:      Mon Jan 21 09:45:01 2002
# capture period:   676 seconds
# compress:        on
# byte order:      little
# stream version: 3
# export version: 5
# lost flows:      0
# corrupt packets: 0
# sequencer resets: 0
# capture flows:   341370
#
```

# flow-stat

- Generates reports from flow files.
- Output is readable and easily imported into graphing programs (gnuplot, etc).
- IP Address, IP address pairs, ports, packets, bytes, interfaces, next hop, Autonomous System, ToS bits, exporter, and tags.

# flow-stat - summary

Total Flows	:	24236730
Total Octets	:	71266806610
Total Packets	:	109298006
Total Time (1/1000 secs) (flows)	:	289031186084
Duration of data (realtime)	:	86400
Duration of data (1/1000 secs)	:	88352112
Average flow time (1/1000 secs)	:	11925.0000
Average packet size (octets)	:	652.0000
Average flow size (octets)	:	2940.0000
Average packets per flow	:	4.0000
Average flows / second (flow)	:	274.3201
Average flows / second (real)	:	280.5177
Average Kbits / second (flow)	:	6452.9880
Average Kbits / second (real)	:	6598.7781

# flow-stat – Source AS % Total

#	#	src AS	flows	octets	packets	duration
#		NSFNETTEST14-AS	6.430	6.582	7.019	5.693
		ONENET-AS-1	2.914	4.417	3.529	3.566
		UONET	0.600	4.052	2.484	1.979
		UPITT-AS	1.847	3.816	2.697	2.552
		CONCERT	1.786	2.931	2.391	1.955
		OHIOU	3.961	2.601	2.140	1.655
		CMU-ROUTER	1.962	2.577	2.349	2.075
		BOSTONU-AS	1.503	2.126	1.665	1.914
		PURDUE	2.185	1.994	2.157	2.507
		STANFORD	2.124	1.950	2.270	2.636
		UR	1.809	1.919	1.652	1.532
		UMN-AGS-NET-AS	1.612	1.895	1.788	1.938
		RISQ-AS	1.086	1.849	1.378	1.367
		PENN-STATE	2.845	1.641	2.666	2.190
		RIT-ASN	0.796	1.601	1.414	0.830

# flow-stat - Dest AS % Total

#	# dst AS	flows	octets	packets	duration
#					
NSFNETTEST14-AS	6.202	9.564	8.005	6.762	
PENN-STATE	2.037	3.774	2.712	2.153	
CONCERT	2.628	3.133	2.888	2.326	
ONENET-AS-1	2.818	2.434	2.906	3.000	
STANFORD	1.915	2.360	2.122	2.195	
JANET	2.508	2.319	2.150	2.485	
0	0.831	2.187	2.431	2.910	
DFN-WIN-AS	2.349	2.099	1.938	2.359	
CMU-ROUTER	1.383	2.090	1.972	1.960	
UONET	0.537	2.067	1.699	1.397	
PURDUE	2.029	1.934	1.983	2.177	
UMN-AGS-NET-AS	1.608	1.784	1.664	1.681	
UPITT-AS	1.507	1.707	2.067	2.288	
MIT-GATEWAYS	0.677	1.425	1.175	0.806	
RIT-ASN	0.644	1.313	1.243	0.868	
INDIANA-AS	0.899	1.285	0.996	0.781	

# flow-stat - Src/Dest AS % Total

#	# src AS	dst AS	flows	octets	packets	duration
#	GEORGIA-TECH	PENN-STATE	0.030	0.965	0.459	0.071
	NWU-AS	0	0.008	0.734	0.379	0.170
	UONET	CONCERT	0.064	0.698	0.438	0.290
	UCLA	NSFNETTEST14-AS	0.037	0.568	0.269	0.111
	CONCERT	UONET	0.052	0.543	0.364	0.221
	BCNET-AS	MIT-GATEWAYS	0.019	0.538	0.274	0.134
	UONET	0	0.015	0.536	0.318	0.200
	MIT-GATEWAYS	STANFORD	0.032	0.477	0.245	0.073
	ONENET-AS-1	NSFNETTEST14-AS	0.140	0.451	0.263	0.159
	UONET	PENN-STATE	0.019	0.439	0.200	0.063
	NOAA-AS	NOAA-FSL	0.018	0.438	0.255	0.031
	DENET	UONET	0.032	0.410	0.189	0.188
	NSFNETTEST14-AS	UC-DOM	0.022	0.365	0.244	0.081
	ITALY-AS	UONET	0.016	0.358	0.228	0.117
	NSFNETTEST14-AS	CONCERT	0.322	0.349	0.335	0.228
	UONET	ITALY-AS	0.022	0.349	0.210	0.130

# flow-dscan

- DoS detection / network scanning tool.
- Flag hosts which have flows to many other hosts.
- Flag hosts which are using a large number of TCP/UDP ports.
- Works better on smaller networks or with flow-filter to limit traffic.  
For example filter TCP port 25 to

# flow-gen

- Debugging tool to generate flows.

```
eng1:% flow-gen -v8.1 | flow-print | head -10
```

srcAS	dstAS	in	out	flows	octets	packets	duration
0	65280	0	65280	2	1	1	4294901760
1	65281	1	65281	4	2	2	4294901760
2	65282	2	65282	6	3	3	4294901760
3	65283	3	65283	8	4	4	4294901760
4	65284	4	65284	10	5	5	4294901760
5	65285	5	65285	12	6	6	4294901760
6	65286	6	65286	14	7	7	4294901760
7	65287	7	65287	16	8	8	4294901760
8	65288	8	65288	18	9	9	4294901760

# flow-send

- Transmit flow files with NetFlow protocol to another collector.
- Can be used to take flow-tools files and send them to other NetFlow compatible collector.

# flow-receive

- Like flow-capture but does not manage disk space. Output is to standard out and can be used directly with other flow-tools programs.
- Typically used for debugging.

```
eng1:~ flow-receive 0/0/5555 | flow-print
flow-receive: New exporter: time=1011652474 src_ip=199.18.112.114
  dst_ip=199.18.97.102 d_version=8
srcPrefix      srcAS  dstPrefix          dstAS  input   output flows
143.105/16     600    128.9/16          4       48      25      1
140.141/16     600    150.216/16        81      48      25      4
132.235/16     17135   130.49/17        4130    38      25     25
131.123/16     11050   129.59/16        7212    42      25      1
206.21/16      600    128.239/16       11975   48      25      2
199.218/16     600    128.255/16       3676    48      25      1
```

# flow-import

- Import flows from other formats into flow-tools.
- Currently supports ASCII and cflowd formats.

# flow-export

- Export flows from flow-tools files to other formats.
- Currently supports ASCII and cflowd formats.
- ASCII output can be used with perl or other scripting languages (with a performance penalty).

# flow-xlate

- Translate flows among NetFlow versions.
- Originally intended for use with Catalyst switches since they export some flows in version 7 and others in version 5 format.

# Front End applications

- Flow-tools is good at collecting raw flows
- You may need additional tools to generate customized reports
- Perl applications are very popular.
  - flowscan.pm
  - Cflow.pm
  - CuGrapher.pl
- Integration with RRDTool, MRTG etc. makes it more useful

# What Next

- IPFIX (IP Flow Information Exchange)
  - To make the flow format uniform and make it easier to write analysis tools
  - <http://www1.ietf.org/html.charters/ipfix-charter.html>
  - [Requirements for IP Flow Information Export \(RFC 3917\)](#)
  - [Evaluation of Candidate Protocols for IP Flow Information Export \(IPFIX\) \(RFC 3955\)](#)

# References

- flow-tools: <http://www.splintered.net/sw/flow-tools>
- NetFlow Applications <http://www.inmon.com/technology/netflowapps.php>
- Netflow HOW-TO  
<http://www.linuxgeek.org/netflow-howto.php>
- IETF standards effort: <http://ipfix.doit.wisc.edu>

# References

- flow-tools: <http://www.splintered.net/sw/flow-tools>
- Abilene NetFlow page <http://www.itec.oar.net/abilene-netflow>
- Flow-tools mailing list:  
[flow-tools@splintered.net](mailto:flow-tools@splintered.net)
- Cisco Centric Open Source  
Community <http://cosi-nms.sourceforge.net/related.html>

# More Info

- e-mail : gaurab @ lahai.com
- Labs and instruction on configuration  
how to configure Flow-tools, and a few  
more front end applications are available  
at
- On the web : <http://lahai.com/netmgmt/>

# Acknowledgements

- Danny McPherson, Arbor
- Bruce Morgan, AARNet